


## Raised Rib

	in	mm
Pitch	1.00	25.4
Minimum Width	1.5	38
Width Increments	0.25	6.4
Opening Size (approximate)	0.2 x 0.2	5 x 5
Open Area	31%	
Product Contact Area	28%	
Hinge Style	Open	
Drive Method	Center-driven	

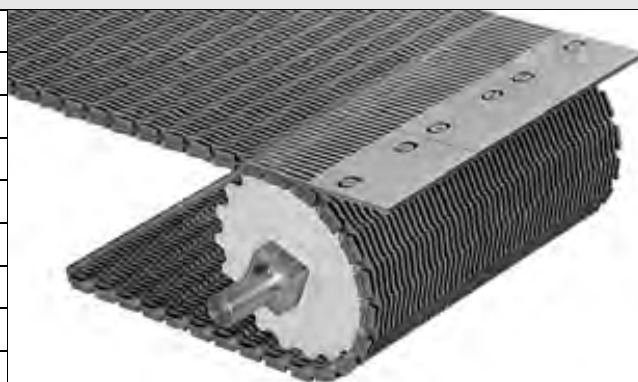


### Product Notes

- **Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt.**
- Smooth upper surface with closely spaced ribs can be used with finger transfer plates, eliminating product tippage and hang-ups.
- Uses headed rods.
- For more material selections and stronger belt performance, see Series 900 Raised Rib.



### Additional Information

- See "Belt Selection Process" (page 7)
- See "Standard Belt Materials" (page 22)
- See "Special Application Belt Materials" (page 22)
- See "Friction factors" (page 26)

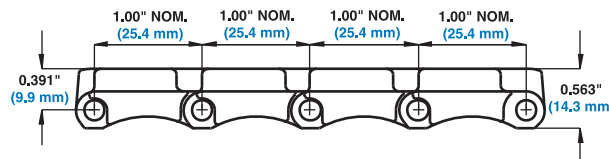

### Belt Data

Belt Material	Standard Rod Material Ø 0.18 in (4.6 mm)	BS		Belt Strength		Temperature Range (continuous)		W		Belt Weight	
		lb/ft	kg/m	°F	°C	lb/ft <sup>2</sup>	kg/m <sup>2</sup>				
Polypropylene	Polypropylene	300	450	34 to 220	1 to 104	0.82	4.00				
Polyethylene	Polyethylene	200	300	-50 to 150	-46 to 66	0.88	4.29				
Acetal	Polypropylene	600	890	34 to 200	1 to 93	1.20	5.86				
Acetal <sup>a</sup>	Polyethylene	550	820	-50 to 70	-46 to 21	1.20	5.86				

a. Polyethylene rods can be used in cold applications when impacts or sudden starts/stops occur. Please note lower rating.