



## Non Skid Raised Rib

	in	mm
Pitch	0.60	15.2
Minimum Width	3.0	76.0
Width Increments	0.5	12.7
Opening Sizes (approx.)	-	-
Open Area	0%	
Hinge Style	Closed	
Drive Method	Center/Hinge-Driven	

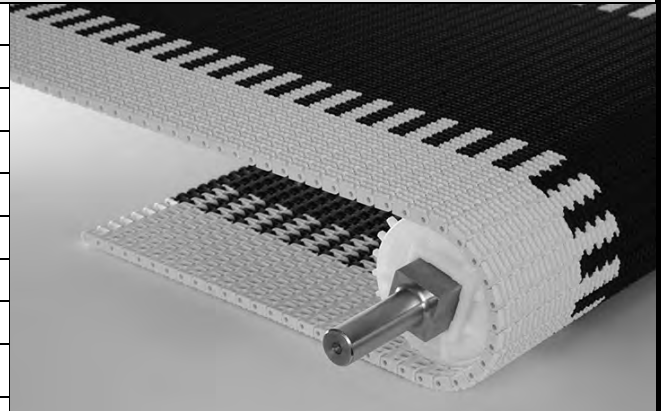


### Product Notes

- **Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt.**
- Mini-pitch reduces chordal action and transfer dead plate gap.
- Minimal back tension required.
- Closed edges on one side of the belt.
- Lug tooth sprockets improve sprocket engagement and make installation easier.
- Finger transfer plates ensure safe transfers, eliminating the need for safety stops and reducing downtime.
- Low profile conveyor reduces the installation costs associated with digging pits.
- Non Skid Raised Rib surface increases traction.
- Two edge options available: no indent and 21 mm indent.

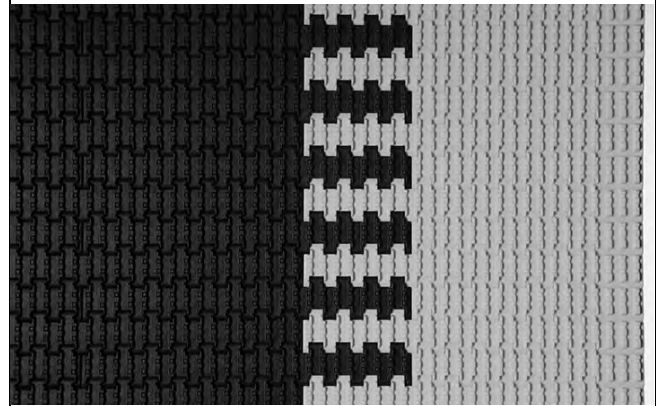

### Additional Information

- See "Belt Selection Process" (page 7)
- See "Standard Belt Materials" (page 22)
- See "Special Application Belt Materials" (page 22)
- See "Friction factors" (page 26)

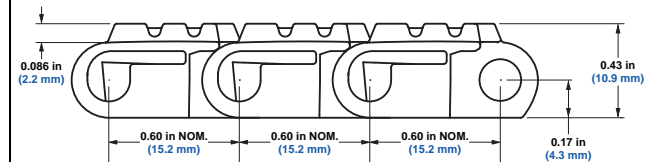

### Belt Data

Belt Material	Standard Rod Material Ø 0.18 in (4.6 mm)	BS		Temperature Range (continuous)		W	Belt Weight
		Belt Strength		°F	°C		
Acetal	Nylon	2000	2976	-50 to 200	-46 to 93	1.86	9.08
EC Acetal	Nylon	1800	2679	-50 to 200	-46 to 93	1.88	9.18
FR Anti Static	Nylon	700	1042	-50 to 150	-46 to 66	1.64	8.01