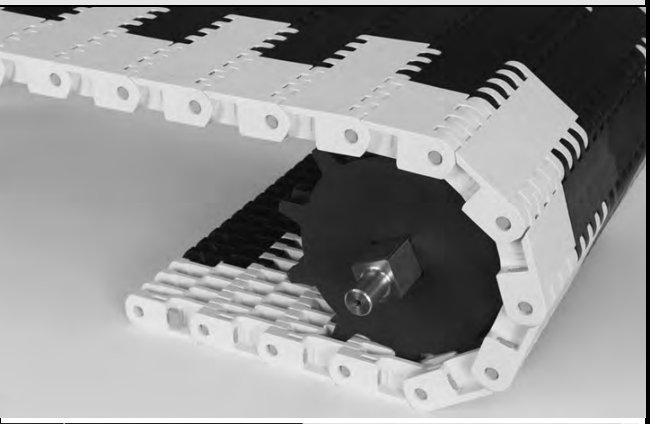
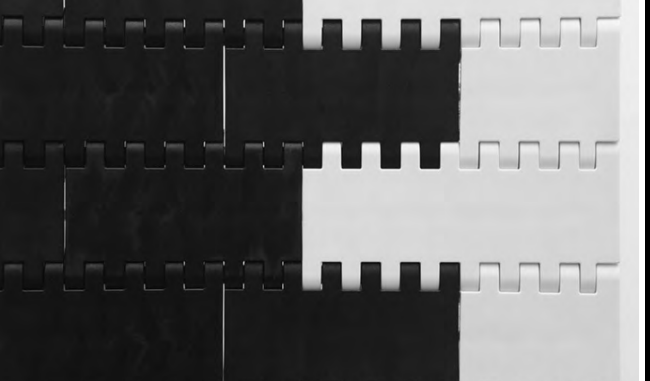
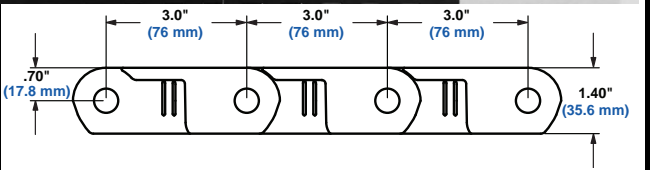


Flat Top		
	in	mm
Pitch	3.0	76
Minimum Width	5.9	150
Maximum Width	153.5	3900
Width Increments	0.98	25
Opening Sizes (approx.)	-	-
Open Area	0%	
Hinge Style	Closed	
Drive Method	Center/Hinge-Driven	
Product Notes		
<ul style="list-style-type: none"> • Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt. • Smooth, closed upper surface • Available in high-strength electrically-conductive acetal, which has a surface resistivity of 10^5 ohms per square • Available in yellow edges. Staggered yellow edges make it easy to distinguish the moving belt from the stationary floor • Wheel chock attachments are available • Fully flush edges with Slidelox® rod retention feature • Slidelox® is an acetal copolymer • Uses headless rods. 		
Additional Information		
<ul style="list-style-type: none"> • See "Belt Selection Process" (page 7). • See "Standard Belt Materials" (page 22). • See "Special Application Belt Materials" (page 22). 		

Belt Data							
Belt Material	Standard Rod Material Ø 0.50 in. (12.7 mm)	BS	Belt Strength	Temperature Range (continuous)		W	Belt Weight
				°F	°C		
Acetal	Nylon	10,000	14,882	-50 to 200	-46 to 93	6.36	31.05
HS EC Acetal	Nylon	8,000	11,905	-50 to 200	-46 to 93	6.36	31.05