




<b>Perforated Flat Top</b>		
	in	mm
Pitch	0.60	15.2
Minimum Width	3	76
Width Increments	1.00	25.4
Opening Size (approximate)	-	-
Open Area	5%	
Hinge Style	Open	
Drive Method	Hinge-driven	

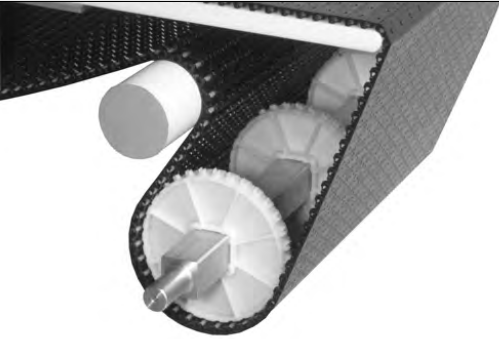

<b>Product Notes</b>
<ul style="list-style-type: none"> <li>Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt.</li> <li>Available with 5/32 in (4 mm) round perforations on a nominal 1 in (25.4 mm) x 0.6 in (15.2 mm) perforation pattern.</li> <li>Uses headless rods.</li> <li>For use on vacuum applications requiring tight, end-to-end transfers.</li> <li>Underside design and small pitch allow the belt to run smoothly around nosebars.</li> <li>Can be used over 0.875 in (22.2 mm) diameter nosebar for tight transfers.</li> <li>For information regarding sprocket placement, refer to the Center Sprocket Offset chart on page 410.</li> </ul>

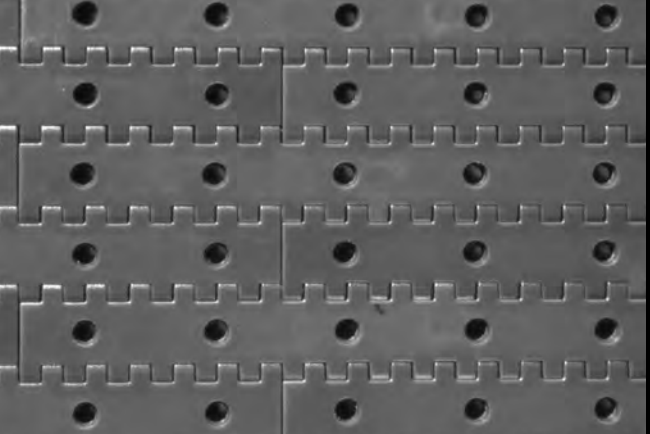

<b>Additional Information</b>
<ul style="list-style-type: none"> <li>See "Belt Selection Process" (page 7)</li> <li>See "Standard Belt Materials" (page 22)</li> <li>See "Special Application Belt Materials" (page 22)</li> <li>See "Friction factors" (page 26)</li> </ul>

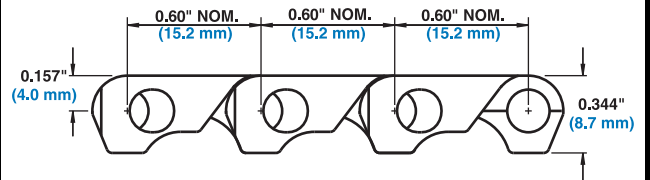

<b>Belt Data</b>							
Belt Material	Standard Rod Material Ø 0.18 in (4.6 mm)	<b>BS</b> Belt Strength		Temperature Range (continuous)		<b>W</b> Belt Weight	
		lb/ft	kg/m	°F	°C	lb/ft <sup>2</sup>	kg/m <sup>2</sup>
Acetal	Polypropylene	1000	1490	34 to 200	1 to 93	1.30	6.35
Acetal <sup>a</sup>	Polyethylene	900	1340	-50 to 70	-46 to 21	1.30	6.35

a. Polyethylene rods can be used in cold applications when impacts or sudden starts/stops occur. Please note lower rating.