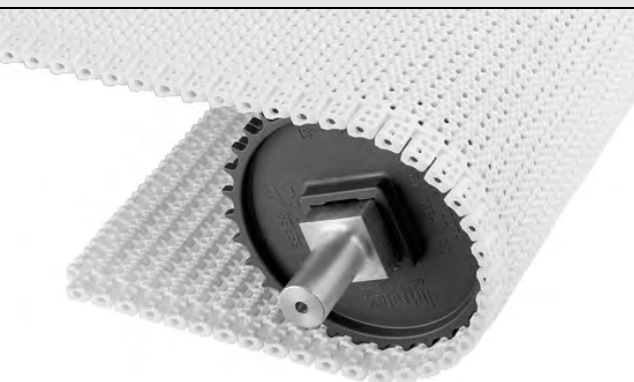
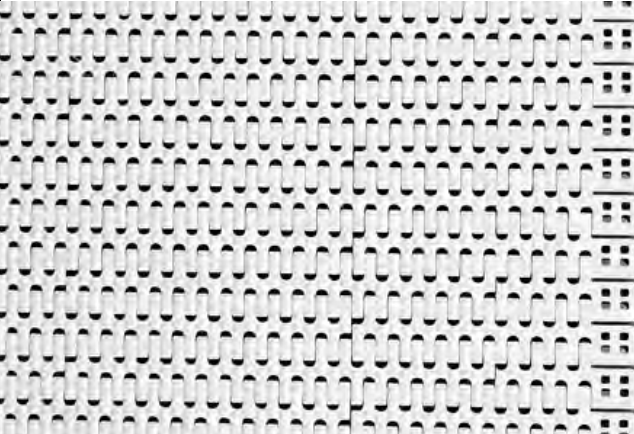
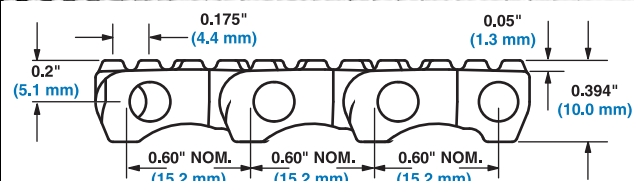


Flush Grid Nub Top™		
	in	mm
Pitch	0.60	15.2
Minimum Width	3	76
Width Increments	1.00	25.4
Opening Size (approx.)	0.18 × 0.09	4.4 × 2.3
Open Area	15%	
Product Contact Area	26%	
Hinge Style	Open	
Drive Method	Hinge-driven	

Product Notes

- Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt.
- Standard Nub indent is 1.0 in (25.4 mm).
- Uses headless rods.
- Nub pattern reduces contact between belt surface and product.
- Manufactured in acetal, polypropylene, and polyethylene (for frozen products).
- Recommended for products large enough to span the distance between the nubs.
- Flush Grid Nub Top flights are available.

Additional Information	
<ul style="list-style-type: none"> See "Belt Selection Process" (page 7) See "Standard Belt Materials" (page 22) See "Special Application Belt Materials" (page 22) See "Friction factors" (page 26) 	

Belt Data							
Belt Material	Standard Rod Material Ø 0.18 in (4.6 mm)	BS Belt Strength ^a		Temperature Range (continuous)		W Belt Weight	
		lb/ft	kg/m	°F	°C	lb/ft ²	kg/m ²
Polypropylene	Polypropylene	700	1040	34 to 220	1 to 104	0.93	4.55
Acetal	Polypropylene	1300	1940	34 to 220	7 to 93	1.36	6.65
Polyethylene	Polyethylene	450	670	-50 to 150	-46 to 66	1.00	4.90
Acetal	Polyethylene	1200	1790	-50 to 70	-46 to 21	1.36	6.65

a. When using polyurethane sprockets, the Belt Strength for polypropylene, acetal, and nylon is 750 lbs/ft (1120 kg/m), and the temperature range for the sprocket is 0 °F (-18 °C) to 120 °F (49 °C). Contact Customer Service for availability of polyurethane sprockets.