

EZ Track™/EZ Clean™ Sprocket^a

No. of Teeth (Chordal Action)	Nom. Pitch Dia. in	Nom. Pitch Dia. mm	Nom. Outer Dia. in	Nom. Outer Dia. mm	Nom. Hub Width in	Nom. Hub Width mm	Available Bore Sizes			
							U.S. Sizes		Metric Sizes	
							Round in	Square in	Round mm	Square mm
12 (3.41%)	2.3	58	2.3	58	1.0	25	1.0	1.0	25	25
16 (1.92%)	3.1	79	3.1	79	1.0	25	1.0		25	
							1-1/16, 1-1/8, 1-1/4		30	
18 (1.52%)	3.5	89	3.5	89	1.0	25	1.0	1.0		25
20 (1.23%)	3.8	97	3.8	97	1.0	25		1.5		40
24 (0.86%)	4.6	117	4.7	119	1.0	25	1.0		25	
							1-1/16, 1-1/8, 1-3/16, 1-1/4		30	
26 (0.73%)	5.1	130	5.1	130	1.0	25	1.0	1.5	25	40
							1-1/16, 1-1/8, 1-1/4		30	
32 (0.48%)	6.1	155	6.2	157	1.0	25	1.0		25	
							1-1/16, 1-1/8, 1-3/16, 1-1/4 1-1/2		30 40	




a. Contact Customer Service for lead times.

Flat Top Base Flights (Streamline)

Available Flight Height		Available Materials
in	mm	
2	51	Polypropylene, Polyethylene, Acetal

Note: Flights can be cut down to any height required for a particular application.
Note: No fasteners required.
Note: Flat Top flight is smooth (Streamline) on both sides.
Note: The Flat Top base streamline flights are used in both Flat Top and Flush Grid belts.
Note: The minimum recommended indent for Flat Top is 2 in (51 mm). The minimum recommended indent for Flush Grid is 1.5 in (38 mm).

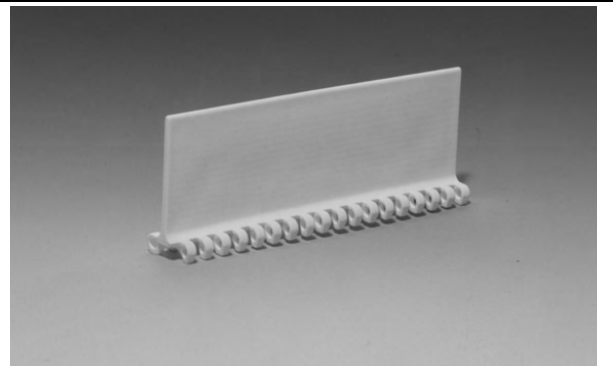

Flush Grid Nub Top Base Flights (No-Cling)

Available Flight Height		Available Materials
in	mm	
2	51	Polypropylene, Polyethylene, Acetal
3	76	Polypropylene, Acetal

Note: Flights can be cut down to any height required for a particular application.
Note: Each flight rises out of the center of the module, molded as an integral part. No fasteners required.
Note: The No-Cling vertical ribs are on both sides of the flight.
Note: The minimum recommended indent is 1 in (25 mm).

