Flush Grid

	in	mm
Pitch	1.44	36.6
Minimum Width	6	152
Width Increments	1.00	25.4
Opening Size (approximate)	-	-
Open Area	24%	
Hinge Style	Closed	
Drive Method	Center-driven	

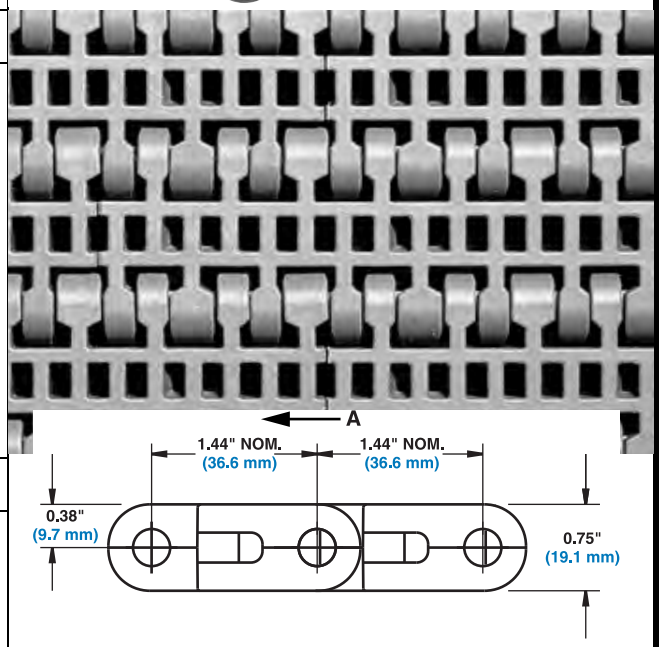

A -Preferred run direction

Product Notes

- **Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt.**
- Module thickness is 0.75 in (19.1 mm) which provides superior belt strength and stiffness.
- Improved Slidelox® rod retention system.
- Uses headless rods.
- Molded split plastic sprockets available for easy installation.
- Made of engineered resin for increased stiffness and minimal belt elongation through thermal expansion.
- Slidelox is glass reinforced polypropylene.

Additional Information

- See *"Belt Selection Process"* (page 7)
- See *"Standard Belt Materials"* (page 22)
- See *"Special Application Belt Materials"* (page 22)
- See *"Friction factors"* (page 26)

Belt Data

Belt Material	Standard Rod Material Ø 0.31 in (7.9 mm)	BS Belt Strength[a]		Temperature Range (continuous)		W Belt Weight	
		lb/ft	kg/m	°F	°C	lb/ft²	kg/m²
Polypropylene Composite	Polypropylene	3300	4908	34 to 220	1 to 104	2.87	14.01

a. Belt strength rating is dependent on belt's preferred running direction. If run in the opposite direction, the belt rating is 2000 lb/ft (3000 kg/m).