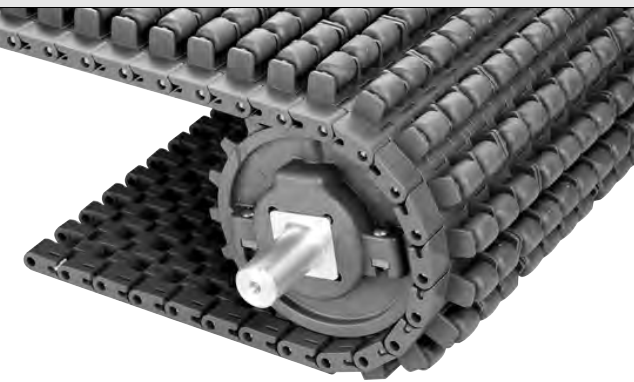
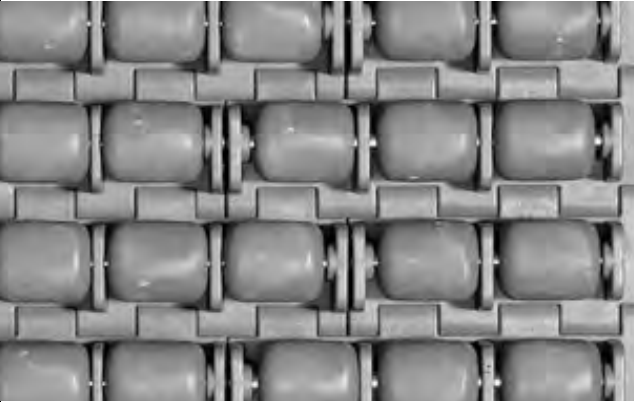
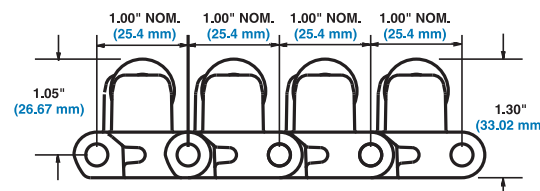


Roller Top™		
	in	mm
Pitch	1.00	25.4
Minimum Width	5	127
Width Increments	1.00	25.4
Roller Diameter	0.70	17.8
Roller Length	0.83	21.0
Open Area	0%	
Hinge Style	Closed	
Drive Method	Center/hinge-driven	
Product Notes		
<ul style="list-style-type: none"> • Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt. • Allows low back pressure accumulation for gentle product handling. • 144 rollers per square foot of belt provide greater product-to-roller contact. • Standard roller indent is 0.75 in (19 mm) • 1 in (25.4 mm) roller spacing. • Available in white and grey acetal. • Uses headless rods. • Stainless steel roller axle pins for durability. • Robust design offers excellent belt and sprocket durability. • Slidelox® flush edges. Slidelox is available in polypropylene or acetal. • Back-up load is 5-10% of product weight. 		
Additional Information		
<ul style="list-style-type: none"> • See "Belt Selection Process" (page 7) • See "Standard Belt Materials" (page 22) • See "Special Application Belt Materials" (page 22) • See "Friction factors" (page 26) 		

Belt Data							
Belt Material	Standard Rod Material Ø 0.24 in (6.1 mm)	BS Belt Strength		Temperature Range (continuous)		W Belt Weight	
		lb/ft	kg/m	°F	°C	lb/ft²	kg/m²
Acetal	Nylon	2500	3720	-50 to 200	-46 to 93	5.83	28.47