



Non Skid

	in	mm
Pitch	1.00	25.4
Minimum Width	9	229
Width Increments	1.00	25.4
Opening Size (approx.)	-	-
Open Area	0%	
Hinge Style	Closed	
Drive Method	Center/hinge-driven	

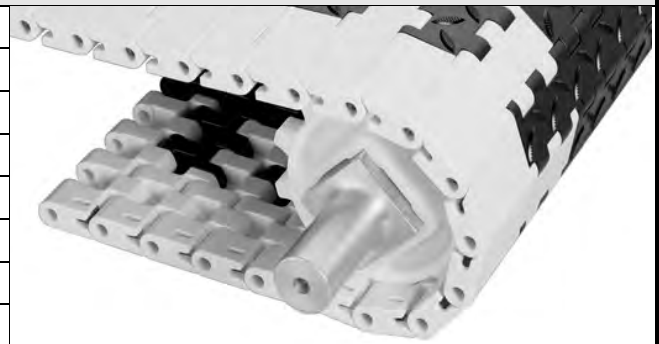


Product Notes

- **Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt.**
- Robust design offers excellent belt and sprocket durability.
- Slidelox® rod retention system. Slidelox is available in polypropylene or acetal.
- Uses headless rods.
- 1.00 (25.4 mm) pitch accommodates small drive sprockets for low-profile people carriers.
- Diamond tread pattern provides a non-skid walking surface to increase safety.
- Staggered yellow edges make it easy to distinguish the moving belt from the stationary floor.
- Edges have Flat Top surface (no treads).
- Minimum nominal alternating edge indents of 2 in (51 mm) and 3 in (76 mm).

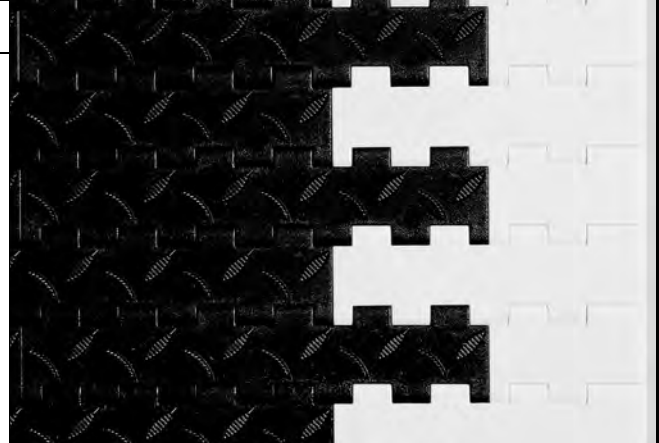

Additional Information

- See "Belt Selection Process" (page 7)
- See "Standard Belt Materials" (page 22)
- See "Special Application Belt Materials" (page 22)
- See "Friction factors" (page 26)

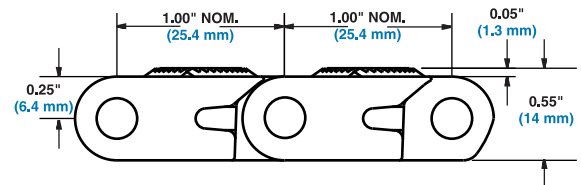

Belt Data

Belt Material	Standard Rod Material Ø 0.24 in (6.1 mm)	BS Belt Strength		Temperature Range (continuous)		W Belt Weight	
		lb/ft	kg/m	°F	°C	lb/ft ²	kg/m ²
EC Acetal	Nylon	1875	2790	-50 to 200	-46 to 93	2.78	13.57
Polypropylene	Nylon	1800	2678	34 to 220	1 to 104	2.32	11.33