



**Flush Grid with Contained Edge**

	in	mm
Pitch	0.50	12.7
Minimum Width	8	203
Width Increments	2.0	50.8
Minimum Opening Size (approx.)	0.87 × 0.30	22.1 × 7.6
Maximum Opening Size (approx.)	0.66 × 0.30	16.8 × 7.6
Open Area	48%	
Hinge Style	Open	
Drive Method	Hinge-driven	

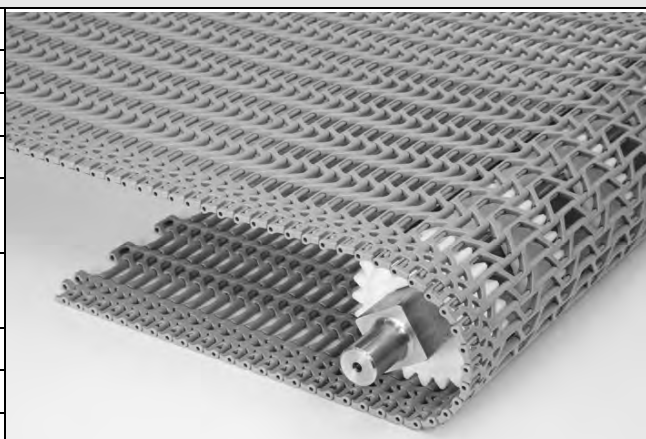


**Product Notes**

- Always check with Customer Service for precise belt width measurement and stock status before designing a conveyor or ordering a belt.
- Available in 2" increments.
- Designed for a 0.5 in (12.7 mm) nosebar.
- Smooth upper surface with fully flush edges.
- Uses headless rods.
- 0.140 in (3.6 mm) diameter rods.
- Recessed rod retention feature provides superior rod containment.

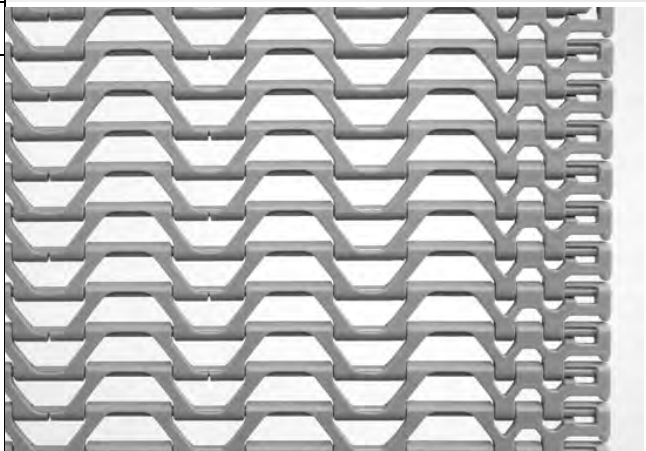

**Additional Information**

- See "Belt Selection Process" (page 7)
- See "Standard Belt Materials" (page 22)
- See "Special Application Belt Materials" (page 22)
- See "Friction factors" (page 26)

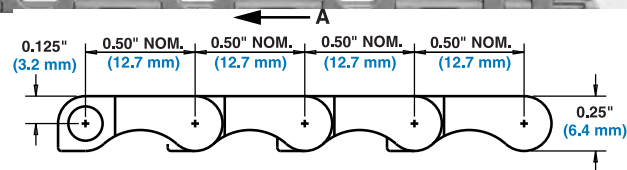

**Belt Data**

Belt Material	Standard Rod Material Ø 0.180 in (4.6 mm)	BS Belt Strength		Temperature Range (continuous)		W Belt Weight	
		lb/ft	kg/m	°F	°C	lb/ft <sup>2</sup>	kg/m <sup>2</sup>
HR Nylon <sup>a</sup>	Nylon	175	260	-50 to 240	-46 to 116	0.58	2.83

a. This product may not be used for food contact articles that will come in contact with food containing alcohol.