
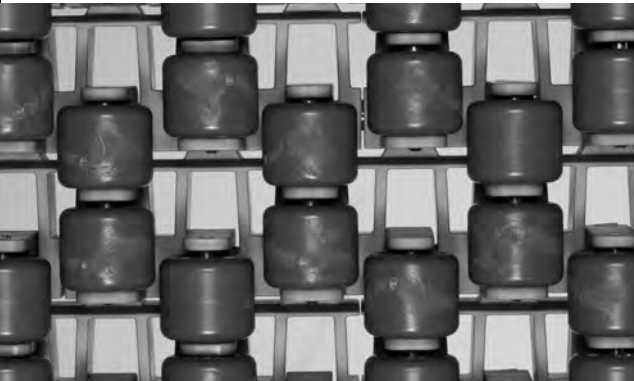
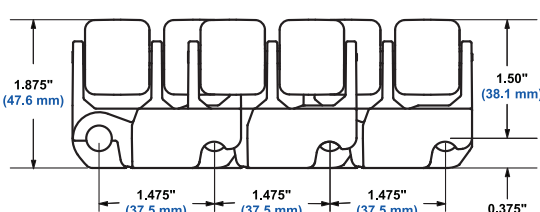


Transverse Roller Top™		
	in	mm
Pitch	1.475	37.5
Minimum Width	12	304.8
Width Increments	2.00 ^a	50.8
Min. Opening Size (approx.)	0.62 x 0.50	16 x 13
Max. Opening Size (approx.)	0.70 x 0.26	18 x 7
Open Area	26%	
Hinge Style	Closed	
Drive Method	Center/Hinge-Driven	
Product Notes		
<ul style="list-style-type: none"> • Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt. • Robust design offers excellent belt and sprocket durability, especially in tough, material handling applications. • Uses headless rods. • Sprockets have large lug teeth. • Ultra abrasion resistant polyurethane sprockets. • Split sprockets are available. • Roller axles are stainless steel for durability and long-lasting performance. • Roller diameter is 0.95 in (24.1 mm). • Roller length is 0.825 in (21 mm). • Roller spacing is 1.0 in (25.4 mm). • Minimum return roller diameter is 6.0 in (152.4 mm). • Must be assembled in 2-row increments. 		
Additional Information		
<ul style="list-style-type: none"> • See “Belt Selection Process” (page 7) • See “Standard Belt Materials” (page 22) • See “Special Application Belt Materials” (page 22) • See “Friction factors” (page 26) 		

a. Available in width increments of 2 in (50.8 mm) except 14 in (356 mm) wide belt not available.

Belt Data								
Belt Material	Standard Rod Material Ø 0.312 in (7.9 mm)	BS	Belt Strength	Temperature Range (continuous)		W	Belt Weight	
			lb/ft	kg/m	°F	°C	lb/ft ²	kg/m ²
Polypropylene	Nylon		2200	3270	34 to 200	1 to 93	4.70	22.96