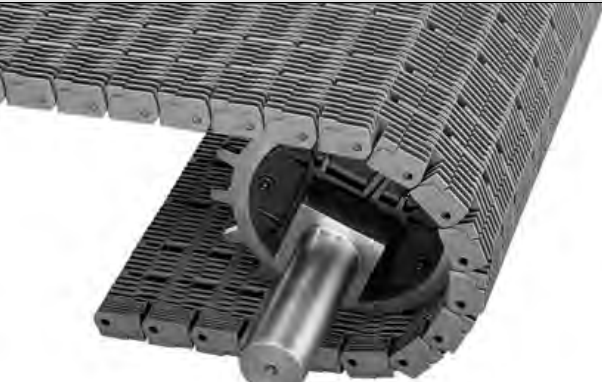

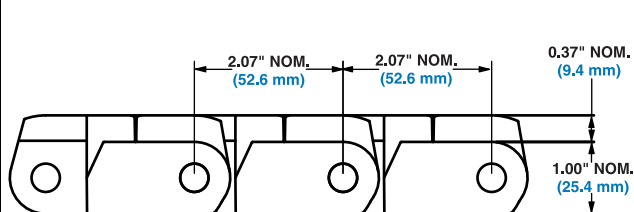


<b>Raised Rib</b>		
	in	mm
Pitch	2.07	52.6
Minimum Width	15	381
Width Increments	1.00	25.4
Opening Sizes (approx.)	-	-
Open Area	27%	
Hinge Style	Closed	
Drive Method	Center/Hinge-Driven	
<b>Product Notes</b>		
<ul style="list-style-type: none"> <li>• <b>Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt.</b></li> <li>• Increased module thickness and rod diameter provide superior belt strength and increases belt life.</li> <li>• Shuttleplug™ self-closing rod retention system.</li> <li>• Uses headless rods.</li> <li>• Split sprockets available for easy installation.</li> <li>• Made of engineered resin for increased resistance to chemicals and temperature cycling.</li> <li>• Minimal back tension required.</li> <li>• More robust transfers utilize taller belt ribs and stronger fingers.</li> </ul>		
<b>Additional Information</b>		
<ul style="list-style-type: none"> <li>• See "Belt Selection Process" (page 7)</li> <li>• See "Standard Belt Materials" (page 22)</li> <li>• See "Special Application Belt Materials" (page 22)</li> <li>• See "Friction factors" (page 26)</li> </ul>		

<b>Belt Data</b>							
Belt Material	Standard Rod Material 0.38 (9.7 mm)	<b>BS</b> Belt Strength		Temperature Range (continuous)		<b>W</b> Belt Weight	
		lb/ft	kg/m	°F	°C	lb/ft²	kg/m²
Enduralox™ Polypropylene	Polypropylene	4000	5952	34 to 220	1 to 104	3.90	19.04