


## Flush Grid

	in	mm
Pitch	2.00	50.8
Minimum Width	2	51
Width Increments	0.36	9.1
Opening Size (approximate)	0.22 × 0.49	5.5 × 12.5
Open Area	33%	
Hinge Style	Closed	
Drive Method	Hinge-driven	




### Product Notes

- **Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt.**
- Flush grid pattern with smooth upper surface.
- Uses headed rods.
- Offers excellent lateral movement of containers.
- One of the strongest belt styles in Series 200.
- Flights and sideguards are available.
- For an alternative to Series 200 Flush Grid with more material selections, see Series 400, Series 900, Series 1100, and Series 2200 belt styles.
- Series 200 Flush Grid has double-headed hinge rods so the belt edge is not fully flush.

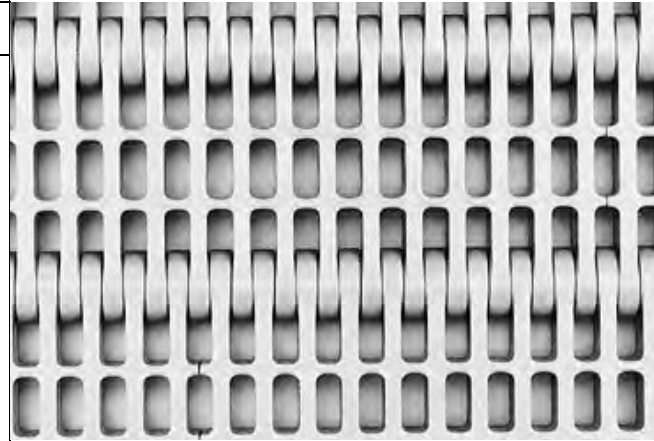

### Additional Information

- See "Belt Selection Process" (page 7)
- See "Standard Belt Materials" (page 22)
- See "Special Application Belt Materials" (page 22)
- See "Friction factors" (page 26)

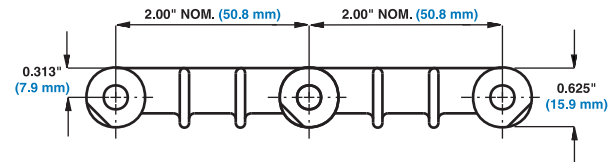

### Belt Data

Belt Material	Standard Rod Material Ø 0.240 in (6.1 mm)	BS Belt Strength		Temperature Range (continuous)		W Belt Weight	
		lb/ft	kg/m	°F	°C	lb/ft <sup>2</sup>	kg/m <sup>2</sup>
Polypropylene	Polypropylene	1800	2680	34 to 220	1 to 104	1.40	6.83
Polyethylene	Polyethylene	1200	1790	-100 to 150	-73 to 66	1.44	7.03