




Open Hinge		
	in	mm
Pitch	2.00	50.8
Minimum Width	2	51
Width Increments	0.36	9.1
Opening Size (approximate)	0.26 × 0.48	6.7 × 12.3
Open Area	45%	
Hinge Style	Open	
Drive Method	Hinge-driven	

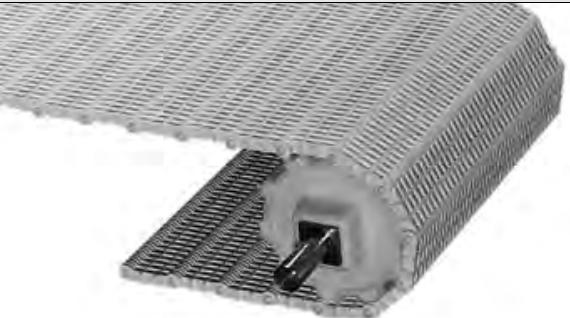

Product Notes

- Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt.
- Smooth surface and generous open area for food handling.
- Uses headed rods.
- Ideal where air cooling, washing or drying is required.
- Flights and sideguards are available.
- For stronger belt performance, see Series 400 Open Hinge.
- Series 200 Open Hinge has double-headed hinge rods so the belt edge is not fully flush.

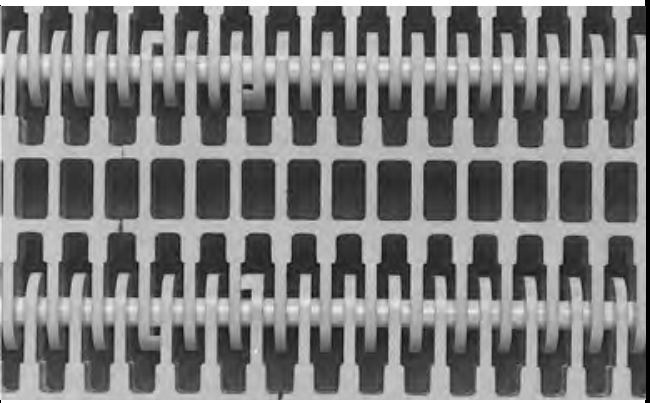

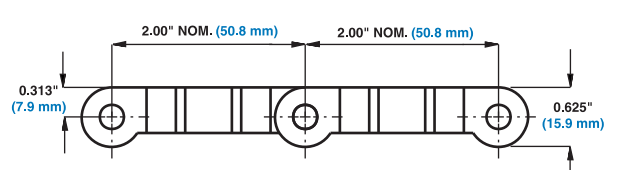

Additional Information

- See "Belt Selection Process" (page 7)
- See "Standard Belt Materials" (page 22)
- See "Special Application Belt Materials" (page 22)
- See "Friction factors" (page 26)

Belt Data							
Belt Material	Standard Rod Material Ø 0.240 in (6.1 mm)	BS		Temperature Range (continuous)		W	
		Belt Strength	Belt Strength	°F	°C	Belt Weight	Belt Weight
		lb/ft	kg/m	°F	°C	lb/ft ²	kg/m ²
Polypropylene	Polypropylene	300	450	34 to 220	1 to 104	1.04	5.08
Polyethylene	Polyethylene	200	300	-50 to 150	-46 to 66	1.12	5.47