


Molded Sprocket^a

No. of Teeth (Chordal Action)	Nom. Pitch Dia. in	Nom. Pitch Dia. mm	Nom. Outer Dia. in	Nom. Outer Dia. mm	Nom. Hub Width in	Nom. Hub Width mm	Available Bore Sizes			
							U.S. Sizes		Metric Sizes	
							Round in	Square in	Round mm	Square mm
8 (7.61%)	3.9	99	4.0	102	1.0	25		1.5		40
13 (2.91%)	6.3	160	64	163	1.0	25		2.5		60
16 (1.92%)	7.7	196	7.8	198	1.0	25		1.5		40
								2.5		60

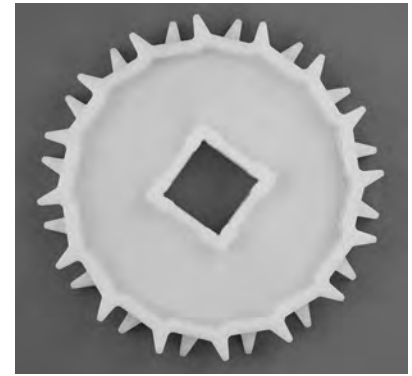

- 1 - Pitch diameter
- 2 - Outer diameter
- 3 - Hub width
- 4 - Section A-A

a. Contact Customer Service for lead times.

EZ Clean Sprocket^a

No. of Teeth (Chordal Action)	Nom. Pitch Dia. in	Nom. Pitch Dia. mm	Nom. Outer Dia. in	Nom. Outer Dia. mm	Nom. Hub Width in	Nom. Hub Width mm	Available Bore Sizes			
							U.S. Sizes		Metric Sizes	
							Round in	Square in	Round mm	Square mm
11 (4.05%)	5.3	135	5.4	137	1.0	25		1.5		40
13 (2.91%)	6.3	160	6.4	163	1.0	25		1.5		40



a. Contact Customer Service for lead times. When using Polyurethane sprockets, the Belt Strength for belts rated over 750 lb/ft (1120 kg/m) will be de-rated to 750 lb/ft (1120 kg/m) and all other belts will maintain their published rating. The temperature range for Polyurethane sprockets is 0° F (-18 °C) to 120°F (49 °C). Contact Customer Service for availability of Polyurethane sprockets.

Acetal Split Sprocket^a

No. of Teeth (Chordal Action)	Nom. Pitch Dia. in	Nom. Pitch Dia. mm	Nom. Outer Dia. in	Nom. Outer Dia. mm	Nom. Hub Width in	Nom. Hub Width mm	Available Bore Sizes			
							U.S. Sizes		Metric Sizes	
							Round in	Square in	Round mm	Square mm
13 (2.91%)	6.3	160	6.4	163	1.5	38	1.5, 1-7/16 ^b	1.5		



a. Contact Customer Service for lead times.
b. Tight fit round bore.