



Nylon Split Sprocket ^a										
No. of Teeth (Chordal Action)	Nom. Pitch Dia. in	Nom. Pitch Dia. mm	Nom. Outer Dia. in	Nom. Outer Dia. mm	Nom. Hub Width in	Nom. Hub Width mm	Available Bore Sizes			
							U.S. Sizes		Metric Sizes	
							Round in	Square in	Round mm	Square mm
16 (1.92%)	5.1	130	5.2	132	1.9	38	1.25	1.5	40	40
18 (1.52%)	5.8	147	5.9	150	1.9	38	1.25	1.5	40	40
20 (1.52%)	6.4	163	6.5	165	1.9	38	1.25	1.5	40	40

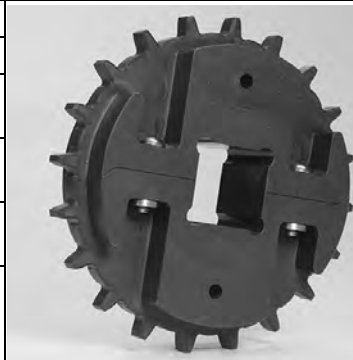

a. Contact Customer Service for lead times.

Nylon Sprocket ^a										
No. of Teeth (Chordal Action)	Nom. Pitch Dia. in	Nom. Pitch Dia. mm	Nom. Outer Dia. in	Nom. Outer Dia. mm	Nom. Hub Width in	Nom. Hub Width mm	Available Bore Sizes			
							U.S. Sizes		Metric Sizes	
							Round in	Square in	Round mm	Square mm
12 (3.41%)	3.9	99	3.9	99	1.0	25	1.25	1.5	25 30 40	40
16 (1.92%)	5.1	130	5.2	132	1.0	25	1.25	1.5	40	40
18 (1.52%)	5.8	147	5.9	150	1.0	25	1.25	1.5	40	40
20 (1.52%)	6.4	163	6.5	165	1.0	25	1.25	1.5	40	40

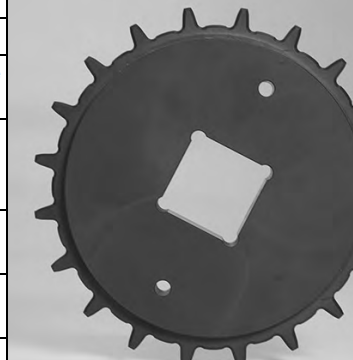


a. Contact Customer Service for lead times.

Conveyor Frame Dimensions

Regardless of type or configuration, all conveyors using Intralox belts have some basic dimensional requirements. Specifically, dimensions “A”, “B”, “C”, and “E” listed below should be implemented in any design.

For general applications and applications where end transfer of tip-sensitive product is not critical, use the “A” dimension at the bottom of the range.

Conveyor frame dimensions are established using the top of the roller as the top of the belt and the bottom of the module as the bottom of the belt. “B” dimension is based on a 0.5 in (12.7 mm) thick carryway.

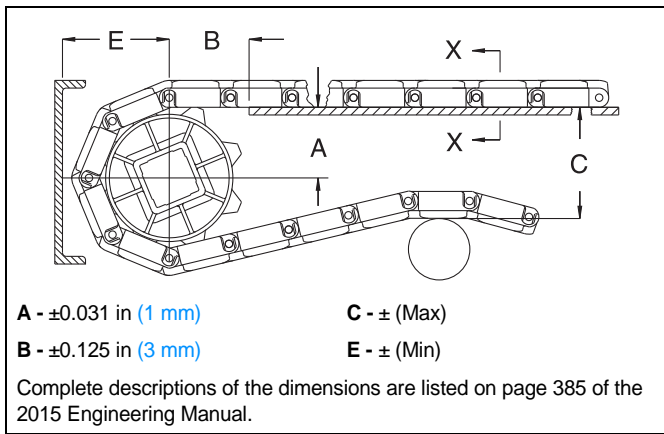

Sprocket Description		A		B		C		E		
Pitch Diameter		No. Teeth	Range (Bottom to Top)		in	mm	in	mm	in	mm
in	mm		in	mm						
3.9	99	12	1.44-1.51	37-38	1.92	49	3.69	94	2.24	57
5.1	130	16	2.09-2.14	53-54	2.27	58	4.95	126	2.88	73
5.8	147	18	2.41-2.45	61-62	2.46	62	5.58	142	3.19	81
6.4	163	20	2.73-2.77	69-70	2.57	65	6.22	158	3.51	89