
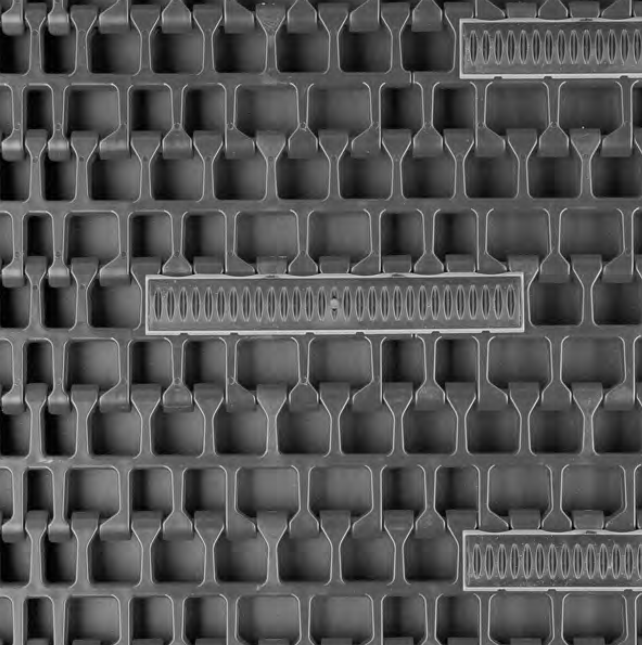
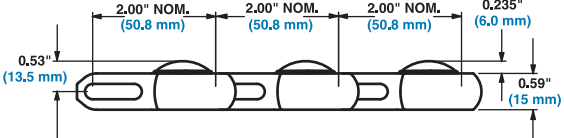


<b>Spiralox® Rounded Friction Top</b>		
	in	mm
Pitch	2.00	50.8
Minimum Width <sup>a</sup>	24	610
Maximum Width	60	1524
Width Increments	1.00	25.4
Opening Size (approximate)	0.94 × 0.65	23.8 × 16.5
Hinge Style	Open	
Drive Method	Hinge-driven	
<b>Product Notes</b>		
<ul style="list-style-type: none"> <li>• <b>Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt.</b></li> <li>• The Intralox Spiral Program will help predict the strength requirements of most low-tension, capstan drive spiral applications, ensuring that the belt is strong enough for the application. Contact Intralox Technical Support for more information.</li> <li>• Friction top available in white polypropylene with white rubber, blue polypropylene with black rubber, and natural polyethylene with white rubber.</li> <li>• Lightweight, relatively strong belt with smooth surface grid.</li> <li>• Belt openings pass straight through the belt, making the belt easy to clean.</li> <li>• Uses headless rods.</li> <li>• Contact Customer Service for preferred run direction on spiral applications.</li> <li>• Contact Customer service for minimum indent requirements.</li> </ul> <p><b>WARNING:</b> Do not place fingers in or on this belt. Fingers can get trapped in belt openings, resulting in personal injury. This belt has pinch points due to the belt spreading and collapsing as it flexes to follow the conveyor path. Pinch points can trap fingers, hair, or clothing, causing personal injury. Do not wear loose clothing, loose gloves, or hand/finger jewelry when working near this belt. Call Customer Service for tags, flyers, and stickers containing this warning.</p>		
<b>Additional Information</b>		
<ul style="list-style-type: none"> <li>• See "Belt Selection Process" (page 7)</li> <li>• See "Standard Belt Materials" (page 22)</li> <li>• See "Special Application Belt Materials" (page 22)</li> <li>• See "Friction factors" (page 26)</li> </ul>		

a. Contact Intralox Customer Service for more information regarding belt widths under 24 in (610mm).

<b>Belt Data</b>													
Base Belt Material	Base/Friction Color	Standard Rod Material Ø 0.24 in (6.1 mm)	<b>BS</b> Belt Strength		Spiral Belt Strength 1.6 TR (2.2, 2.5, 3.2 TR)		Temperature Range (continuous)		<b>W</b> Belt Weight		Friction Top Hardness	Agency Acceptability	
			lb/ft	kg/m	lb	kg	°F	°C	lb/ft <sup>2</sup>	kg/m <sup>2</sup>		FDA (USA)	EU MC <sup>b</sup>
Acetal	Blue/Black	Acetal	1700	2530	375 (475)	170 (215)	34 to 150	1 to 66	1.44 (1.54)	7.03 (7.52)	55 Shore A	•	c
Acetal	White/White	Acetal	1700	2530	376 (475)	171 (215)	35 to 150	2 to 66	1.44 (1.54)	7.03 (7.52)	55 Shore A	a	c
Polypropylene	Blue/Black	Acetal	1500	2232	300 (400)	136 (181)	34 to 150	1 to 66	1.01 (1.04)	4.93 (5.08)	55 Shore A	•	c
Polypropylene	White/White	Acetal	1500	2232	300 (400)	136 (181)	34 to 150	1 to 66	1.01 (1.04)	4.93 (5.08)	55 Shore A	a	c

• - Fully compliant

a - FDA Compliant with Restriction: Do not use in direct contact with fatty foods.

b - European Migration Certificate providing approval for food contact according to EU Regulation 10/2011.

c - EU compliant with Restriction: Do not use in direct contact with fatty foods.