


UHMW Polyethylene Sprocket ^a										
No. of Teeth (Chordal Action)	Nom. Pitch Dia. in.	Nom. Pitch Dia. mm	Nom. Outer Dia. in.	Nom. Outer Dia. mm	Nom. Hub Width in.	Nom. Hub Width mm	Available Bore Sizes			
							U.S. Sizes		Metric Sizes	
							Round in.	Square in.	Round mm	Square mm
8 (7.61%)	5.2	132	5.4	136	0.8	20.32	1-1/4	1-1/2		40 60
							1-7/16	2-1/2		
							1-1/2	2		
10 (4.89%)	6.5	165	6.7	170	0.8	20.32	1-1/4	1-1/2		40 60
							1-7/16	2-1/2		
							1-1/2	2		




a. Contact Customer Service for lead times, preferred method of locking down sprockets, and for proper sprocket timing.

EZ Clean Sprocket ^a										
No. of Teeth (Chordal Action)	Nom. Pitch Dia. in.	Nom. Pitch Dia. mm	Nom. Outer Dia. in.	Nom. Outer Dia. mm	Nom. Hub Width in.	Nom. Hub Width mm	Available Bore Sizes			
							U.S. Sizes		Metric Sizes	
							Round in.	Square in.	Round mm	Square mm
10 (4.89%)	6.5	165	6.7	170	0.8	20.32		2-1/2		

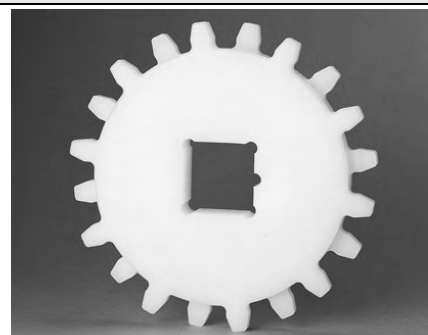

a. Contact Customer Service for lead times.

Support Wheel					
Available Pitch Diameter		Available Bore Sizes			
in	mm	U.S. Sizes		Metric Sizes	
		Round in	Square in	Round mm	Square mm
5.2	132	1.25	1.5		40
		1-7/16	2.5		60
		1.5			
6.5	165	1.25	1.5		40
		1-7/16	2.5		60
		1.5			
		2			

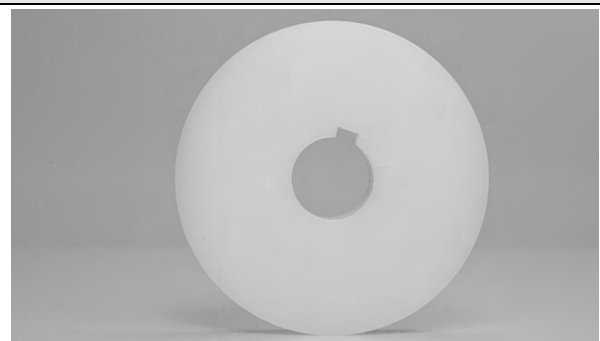

Universal Sideguards		
Available Height		Available Materials
in.	mm	
0.50	12.7	Acetal, HR Nylon, SELM
1.00	25.4	
2.00 ^a	50.8 ^a	



Note: Maximizes product carrying capacity: they fit into the very edge of the belt, with no indent.

Note: Assembly does not require "finger cuts" on the modules, so the belt's beam strength is uncompromised.

Note: Turn ratios that Universal Sideguards can be used in are 1.6, 2.2, 2.5, and 3.2.

a. Only available in 1.6 TR