


### Support Wheel

Available Pitch Diameter		Available Bore Sizes			
in	mm	U.S. Sizes		Metric Sizes	
		Round in	Square in	Round mm	Square mm
6.3	160	1-7/16	1.5		40
		2	2.5		60

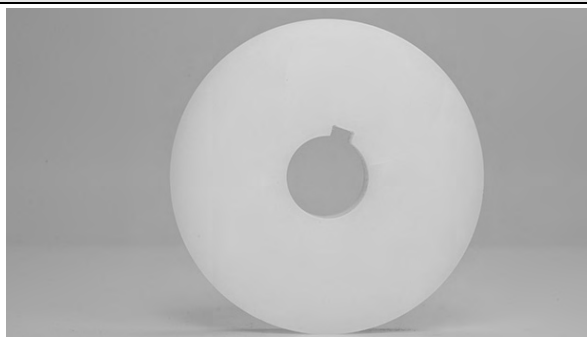

### Overlapping Sideguards

Available Height		Available Materials
in	mm	
0.50	12.7	Acetal
1.0	25.4	Acetal


**Note:** Maximizes product carrying capacity: they fit into the very edge of the belt, with no indent.

**Note:** Assembly does not require "finger cuts" on the modules, so the belt's beam strength is uncompromised.

**Note:** Turn ratio for 0.50 in (12.7 mm) Overlapping Sideguards is 1.6.

**Note:** Makes the belt's outer edge more snag-resistant.

**Note:** Keeps small products from falling through belt gaps.

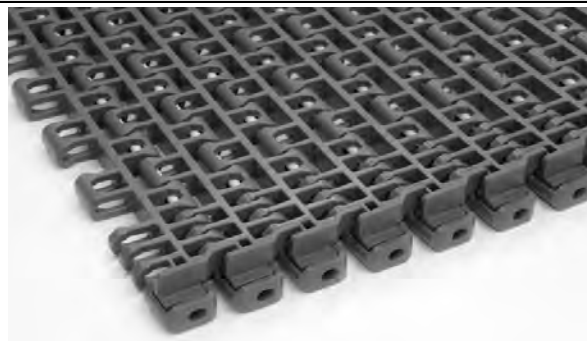

### Lane Dividers

Available Height		Available Materials
in	mm	
0.75	19	Acetal, SELM

**Note:** Assembly does not require "finger cuts" on the modules, so the belt's beam strength is uncompromised.

**Note:** Lane Dividers can be spaced 2 in (50.8 mm) apart along the width of the belt.

**Note:** Please contact Customer Service for minimum indent requirements.

