


Lane Dividers			
Available Height		Available Materials	
in	mm		
0.75	19	Acetal, SELM	




Conveyor Frame Dimensions

Regardless of type or configuration, all conveyors using Intralox belts have some basic dimensional requirements. Specifically, dimensions “A”, “B”, “C” and “E” listed below should be implemented in any design.

For general applications and applications where end transfer of tip-sensitive product is not critical, use the “A” dimension at the bottom of the range.

Conveyor frame dimensions are established using the top of the roller as the top of the belt and the bottom of the module as the bottom of the belt. “B” dimension is based on a 0.5 in (12.7 mm) thick carryway.

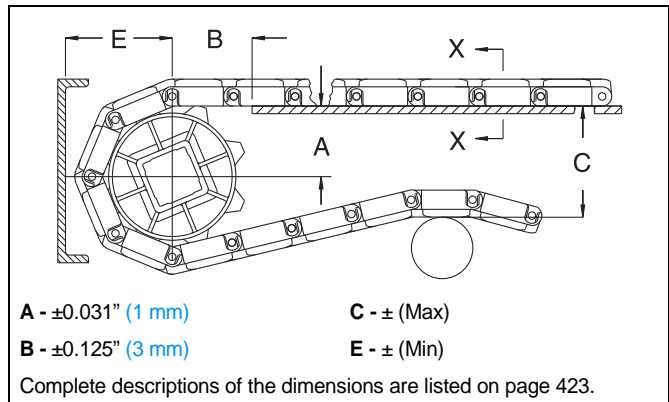

Sprocket Description		A		B		C		E	
Pitch Diameter		Range (Bottom to Top)		in.	mm	in.	mm	in.	mm
in.	mm	No. Teeth	in.						
SPIRALOX® DirectDrive									
6.3	160	13	2.75-2.84	70-72	2.51	64	6.27	159	3.49 89