



0.78 in Diameter 90-Degree Angled Roller™

	in	mm
Pitch	2.0	50.8
Minimum Width	6	152.4
Width Increments	2.0	50.8
Opening Size (approximate)	-	-
Open Area	11%	
Hinge Style	Closed	
Drive Method	Center-driven	

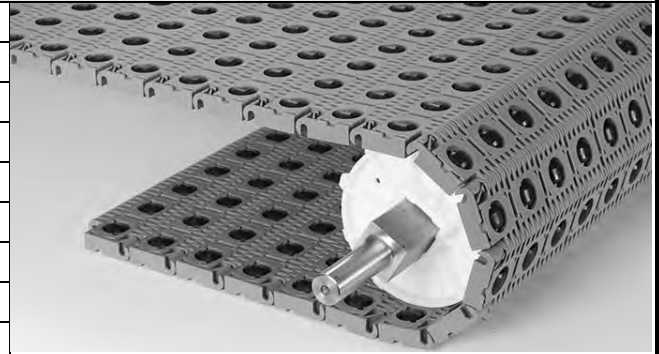


Product Notes

- Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt.
- Black acetal rollers are available. Axles are stainless steel.
- Uses headless rods.
- Roller spacing is 2.0 in (50.8 mm).
- Angled Roller belt is not compatible with the 4.0 in (102 mm) pitch diameter split sprocket and all 5.2 in (132 mm) pitch diameter sprockets with 2.5 in and (60 mm) square bores.

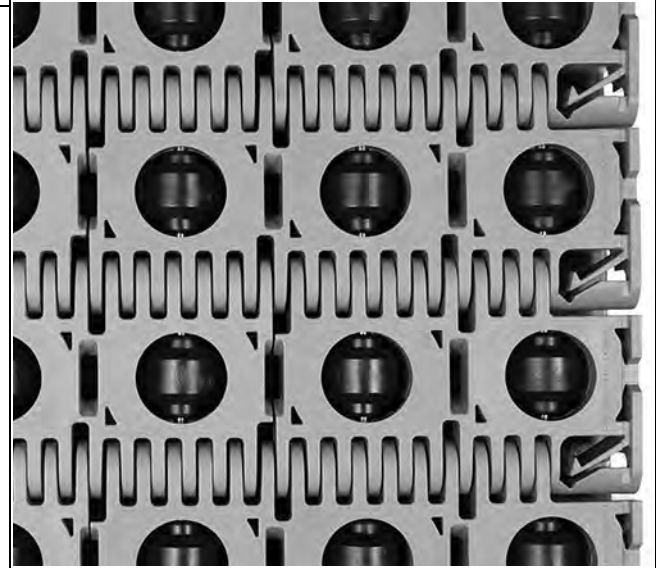

Additional Information

- See "Belt Selection Process" (page 7)
- See "Standard Belt Materials" (page 22)
- See "Special Application Belt Materials" (page 22)
- See "Friction factors" (page 26)

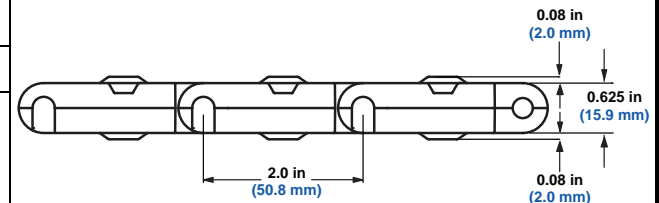

Belt Data

Belt Material	Standard Rod Material Ø 0.24 in (6.1 mm)	BS Belt Strength		Temperature Range (continuous)		W Belt Weight	
		lb/ft	kg/m	°F	°C	lb/ft²	kg/m²
Polypropylene/Black Acetal	Nylon	1600	2381	34 to 200	1 to 93	2.65	12.94