



## Raised Rib

	in	mm
Pitch	2.00	50.8
Minimum Width	See below.	
Width Increments		
Opening Size (approximate)	0.25 × 0.24	6.4 × 6.1
Open Area	26%	
Product Contact Area	36%	
Hinge Style	Closed	
Drive Method	Center-driven	

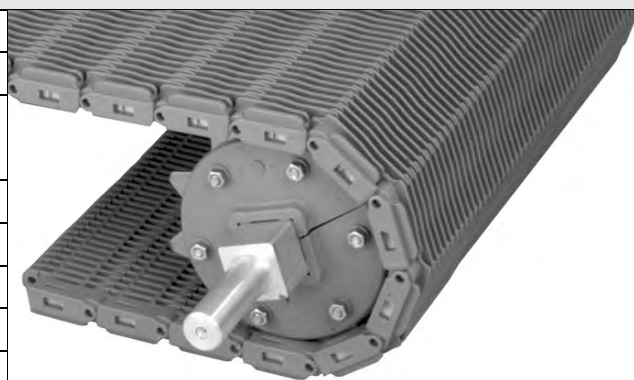


### Product Notes

- **Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt.**
- Raised Ribs extend 0.25 in (6.4 mm) above basic module.
- Use with finger transfer plates to virtually eliminate tipping at infeed and discharge.
- Custom-built in widths from 2 in (51 mm) and up for polyethylene and 3 in (76 mm) and up for polypropylene, in 0.33 in (8.4 mm) increments.
- All S400 Raised Rib polypropylene belts use the Slidelox® rod retention system and headless rods.
- All S400 Raised Rib polyethylene belts use headed rods.
- Slidelox is glass reinforced polypropylene.
- For improved chemical resistance, Slidelox is also available in PVDF for Enduralox polypropylene belts.

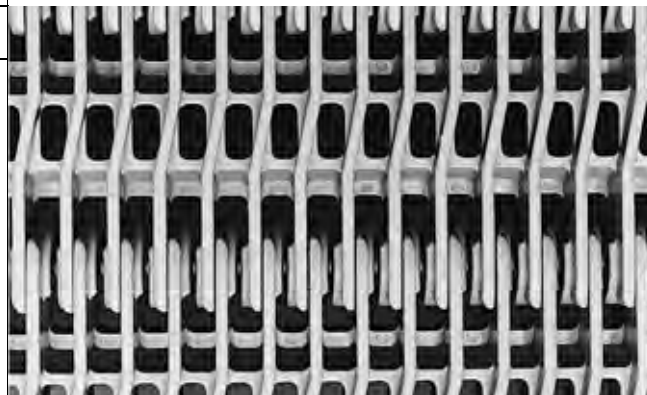

### Additional Information

- See "Belt Selection Process" (page 7)
- See "Standard Belt Materials" (page 22)
- See "Special Application Belt Materials" (page 22)
- See "Friction factors" (page 26)

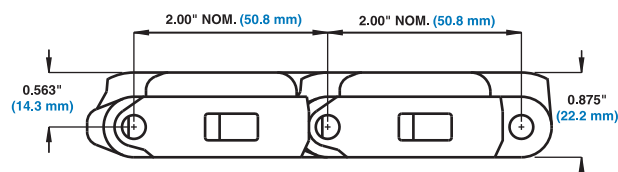

### Belt Data

Belt Material	Standard Rod Material Ø 0.24 in (6.1 mm)	BS		Temperature Range (continuous)		W	
		Belt Strength		°F	°C	Belt Weight	
		lb/ft	kg/m			lb/ft <sup>2</sup>	kg/m <sup>2</sup>
Polypropylene	Polypropylene	2400	3570	34 to 220	1 to 104	1.95	9.52
Polyethylene	Polyethylene	1800	2680	-100 to 150	-73 to 66	1.98	9.67
Enduralox Polypropylene	Polypropylene	2400	3570	34 to 220	1 to 104	1.95	9.52