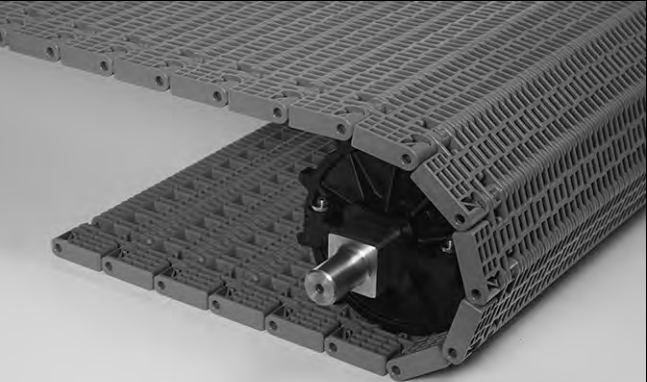
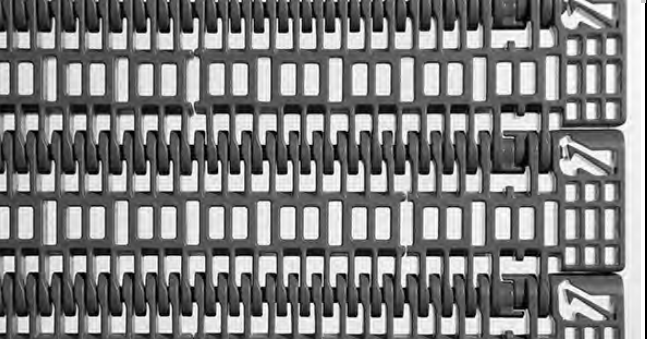
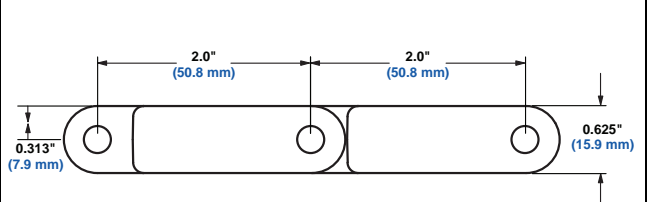


<b>Flush Grid</b>		
	in	mm
Pitch	2.00	50.8
Minimum Width	5	127
Width Increments	1.00	25.4
Opening Sizes (approx.)	0.24 x 0.23	6.1 x 5.8
Open Area	35%	
Hinge Style	Open	
Drive Method	Center-Driven	
<b>Product Notes</b>		
<ul style="list-style-type: none"> <li>• <b>Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt.</b></li> <li>• Smooth upper surface and straightforward design provides free product movement.</li> <li>• Uses headless rods.</li> <li>• Sprockets have large lug teeth.</li> <li>• Opening size prevents 1/4 inch or larger bolt from falling through belt surface.</li> </ul>		
<b>Additional Information</b>		
<ul style="list-style-type: none"> <li>• See "Belt Selection Process" (page 7)</li> <li>• See "Standard Belt Materials" (page 22)</li> <li>• See "Special Application Belt Materials" (page 22)</li> <li>• See "Friction factors" (page 26)</li> </ul>		

<b>Belt Data</b>									
Belt Material	Standard Rod Material Ø 0.24 in (6.1 mm)	<b>BS</b>	Belt Strength		Temperature Range (continuous)		<b>W</b>	Belt Weight	
			lb./ft.	kg/m	°F	°C		lb./ft. <sup>2</sup>	kg/m <sup>2</sup>
Polypropylene	Nylon	2400	3572	34 to 220	1 to 104	1.54	7.52		
Polypropylene	Polypropylene	2200	3274	34 to 220	1 to 104	1.54	7.52		