



Left/Right Roller Top

	in	mm
Pitch	2.00	50.8
Minimum Width	10	254
Width Increments	2.00	50.8
Opening Sizes (approx.)	-	-
Open Area	0%	
Hinge Style	Closed	
Drive Method	Center-Driven	

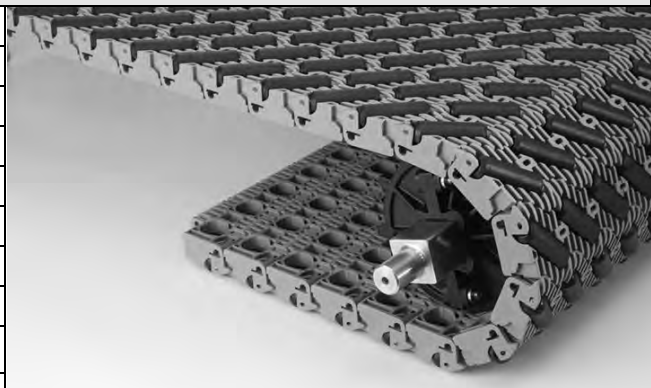


Product Notes

- **Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt.**
- Urethane rollers have an acetal core. Axles are stainless steel.
- Belts configured to divert product to either left or right.
- Uses headless rods.
- Rollers are spaced 2 in (50.8 mm) apart.
- Minimum sprocket spacing is 2.0 in (50.8 mm).
- The smallest allowed sprocket on this belt is 10T.

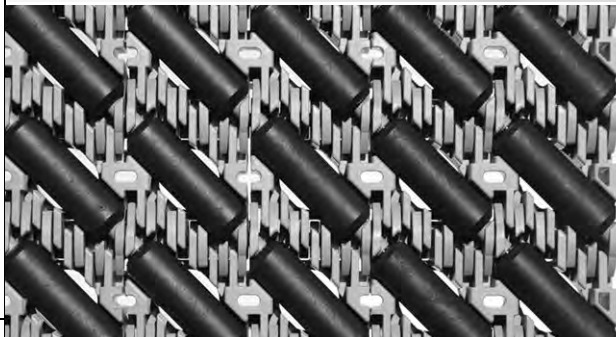

Additional Information

- See "Belt Selection Process" (page 7)
- See "Standard Belt Materials" (page 22)
- See "Special Application Belt Materials" (page 22)
- See "Friction factors" (page 26)

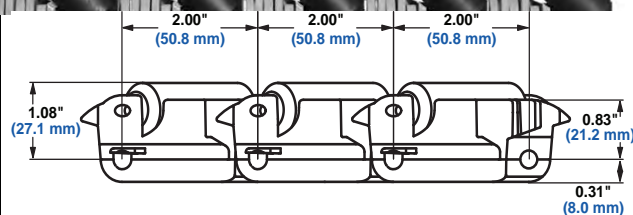

Belt Data

Belt Material	Standard Rod Material Ø 0.24 in (6.1 mm)	BS		Belt Strength		Temperature Range (continuous)		W		Belt Weight	
		lb./ft.	kg/m	°F	°C	lb./ft. ²	kg/m ²				
Polypropylene/Black Polyurethane	Nylon	1600	2380	34 to 200	1 to 93	4.47	21.80				
Acetal	Nylon	2000	2975	-50 to 200	-46 to 93	5.92	28.90				