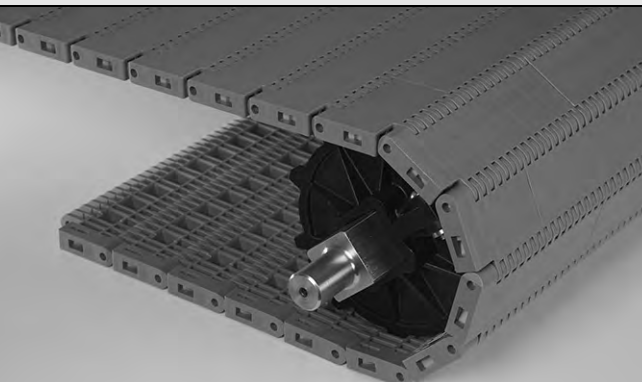
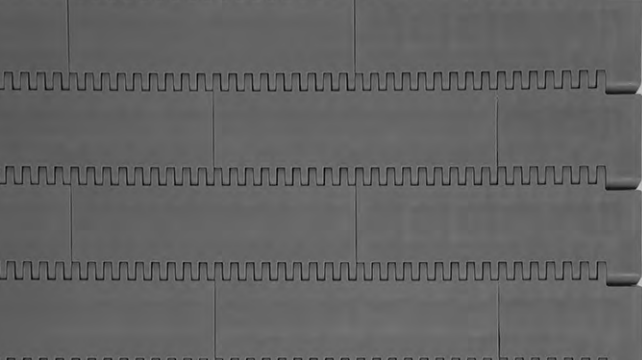
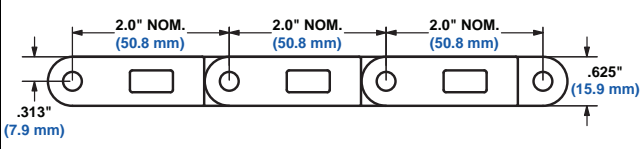


Flat Top		
	in	mm
Pitch	2.00	50.8
Minimum Width	5.00	127
Width Increments	1.00	25.4
Opening Sizes (approx.)	—	—
Open Area	0%	
Hinge Style	Closed	
Drive Method	Center-Driven	
Product Notes		
<ul style="list-style-type: none"> • Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt. • Smooth, closed upper surface. • Uses headless rods. • Available in yellow edges. Staggered yellow edges make it easy to distinguish the moving belt from the stationary floor. • Wheel chocks are available. Series 4500 Flat Top modules are used to mount the wheel chocks. • Fully flush edges with Slidelox® rod retention feature. • Slidelox is a glass-reinforced polypropylene. 		
Additional Information		
<ul style="list-style-type: none"> • See “Belt Selection Process” (page 7) • See “Standard Belt Materials” (page 22) • See “Special Application Belt Materials” (page 22) • See “Friction factors” (page 26) 		

Belt Data											
Belt Material	Standard Rod Material Ø 0.24 in (6.1 mm)	BS		Belt Strength		Temperature Range (continuous)		W		Belt Weight	
		lb/ft	kg/m	°F	°C	lb/ft ²	kg/m ²				
Acetal	Nylon	4400	6548	-50 to 200	-46 to 93	3.07	14.96				
HSEC Acetal	Nylon	4100	6101	-50 to 200	-46 to 93	3.08	15.04				
AC/EC	Nylon	4400	6548	-50 to 200	-46 to 93	3.08	15.04				
Polypropylene	Nylon	3900	5804	34 to 200	1 to 93	1.97	9.62				
Polypropylene	Polypropylene	2500	3720	34 to 220	1 to 104	1.85	9.03				