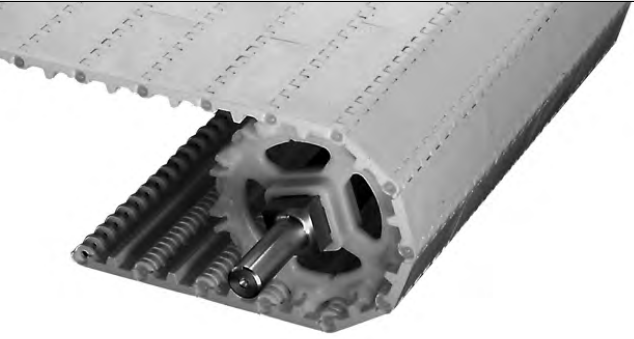
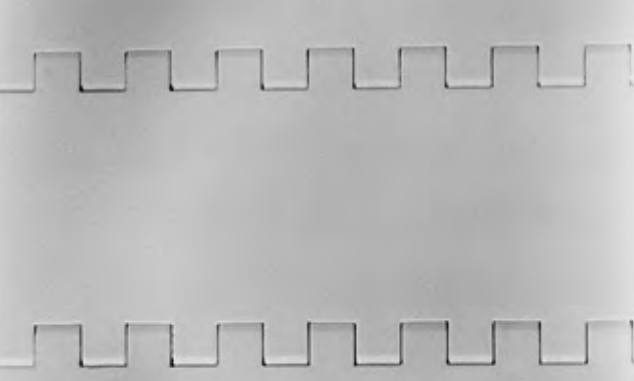
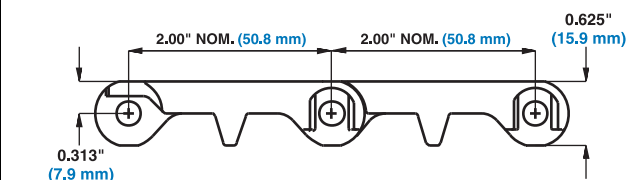


<b>Flat Top</b>		
	in	mm
Pitch	2.00	50.8
Minimum Width	2	51
Width Increments	0.66	16.8
Opening Size (approximate)	-	-
Open Area	0%	
Hinge Style	Open	
Drive Method	Center-driven	
<b>Product Notes</b>		
<ul style="list-style-type: none"> <li>• <b>Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt.</b></li> <li>• Smooth, closed upper surface with fully flush edges.</li> <li>• Uses headed rods.</li> <li>• Impact resistant belt designed for tough Meat Industry applications.</li> <li>• Flights and sideguards are available.</li> </ul>		
<b>Additional Information</b>		
<ul style="list-style-type: none"> <li>• See "Belt Selection Process" (page 7)</li> <li>• See "Standard Belt Materials" (page 22)</li> <li>• See "Special Application Belt Materials" (page 22)</li> <li>• See "Friction factors" (page 26)</li> </ul>		

<b>Belt Data</b>							
Belt Material	Standard Rod Material Ø 0.24 in (6.1 mm)	<b>BS</b> Belt Strength		Temperature Range (continuous)		<b>W</b> Belt Weight	
		lb/ft	kg/m	°F	°C	lb/ft <sup>2</sup>	kg/m <sup>2</sup>
Polypropylene	Polypropylene	1000	1490	34 to 220	1 to 104	1.77	8.66
Detectable Polypropylene	Polyethylene	650	967	0 to 150	-18 to 66	1.83	8.93
Polyethylene	Polyethylene	500	750	-50 to 150	-46 to 66	1.87	9.13
Acetal	Polyethylene	900	1340	-50 to 150	-46 to 66	2.75	13.43
Nylon	Polyethylene	1200	1780	-50 to 150	-46 to 66	2.32	11.33