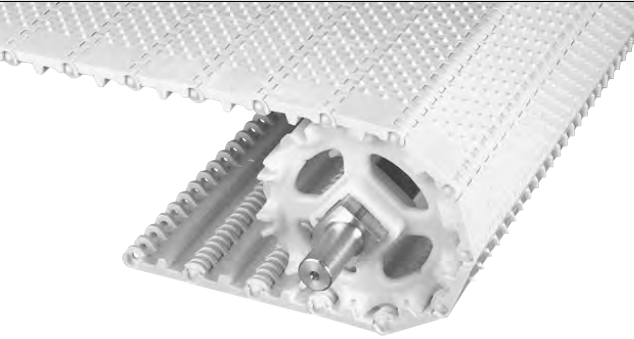
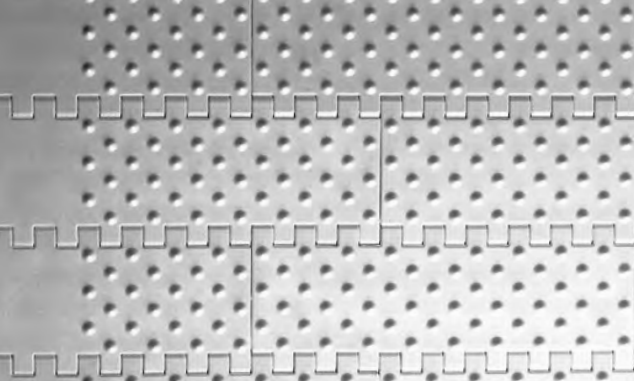
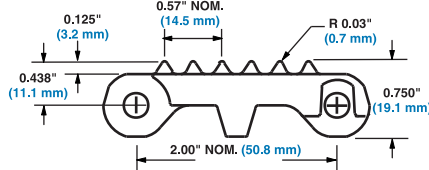


Cone Top™		
	in	mm
Pitch	2.00	50.8
Minimum Width	4	102
Width Increments	0.66	16.8
Opening Size (approximate)	-	-
Open Area	0%	
Hinge Style	Open	
Drive Method	Center-driven	
Product Notes		
<ul style="list-style-type: none"> • Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt. • Closed upper surface with fully flush edges. • Uses headed rods. • Standard flights and sideguards (without cones) are available. • Cone standard indent is 1.3 in (33.0 mm). • Not recommended for back-up conditions. If values are required, contact Intralox Sales Engineering. 		
Additional Information		
<ul style="list-style-type: none"> • See “Belt Selection Process” (page 7) • See “Standard Belt Materials” (page 22) • See “Special Application Belt Materials” (page 22) • See “Friction factors” (page 26) 		

Belt Data							
Belt Material	Standard Rod Material Ø 0.24 in (6.1 mm)	BS Belt Strength		Temperature Range (continuous)		W Belt Weight	
		lb/ft	kg/m	°F	°C	lb/ft ²	kg/m ²
Acetal	Polyethylene	900	1340	-50 to 150	-46 to 66	2.84	13.89