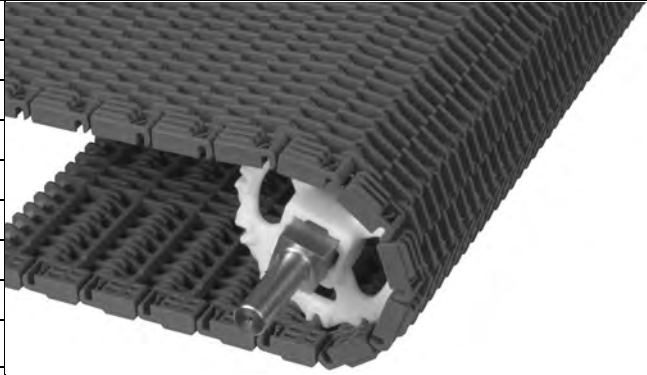
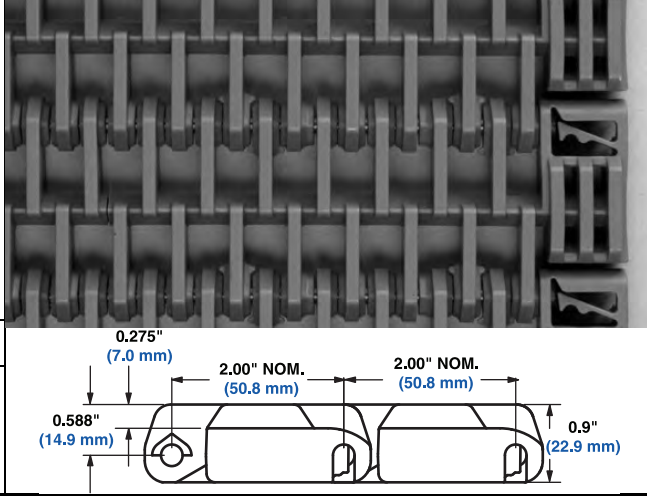


Raised Rib		
	in	mm
Pitch	2.00	50.8
Minimum Width	14	356
Width Increments	2.00	50.8
Opening Sizes (approx.)	0.51 x 0.49	12.9 x 12.4
Open Area	40%	
Hinge Style	Open	
Drive Method	Center-Driven	
Product Notes		
<ul style="list-style-type: none"> • Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt. • Raised Ribs extend 0.275 in (7.0 mm) above basic module with fully flush edges. • Open slots improve drainage and cleanability. • Finger transfer plates are available. • Fully compatible with Series 800 EZ Clean™ angled sprockets. • Cam-link design hinges provide easy cleaning with greater hinge and rod exposure as the belt moves around the sprockets. • Uses headless rods. 		
Additional Information		
<ul style="list-style-type: none"> • See "Belt Selection Process" (page 7) • See "Standard Belt Materials" (page 22) • See "Special Application Belt Materials" (page 22) • See "Friction factors" (page 26) 		

Belt Data							
Belt Material	Standard Rod Material Ø 0.24 in (6.1 mm)	BS Belt Strength		Temperature Range (continuous)		W Belt Weight	
		lb/ft	kg/m	°F	°C	lb/ft ²	kg/m ²
Polypropylene	Polypropylene	1000	1490	34 to 220	1 to 104	1.48	7.23
Enduralox™ PP	Polypropylene	1000	1490	34 to 220	1 to 104	1.48	7.23