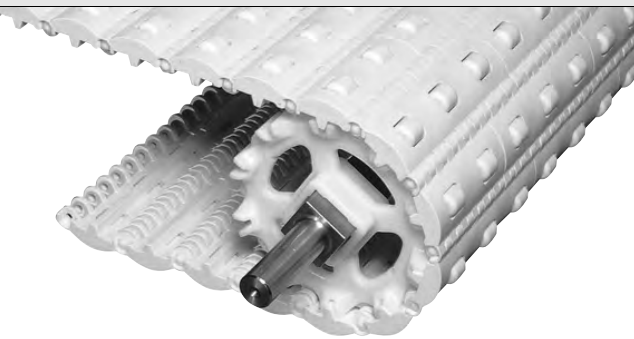
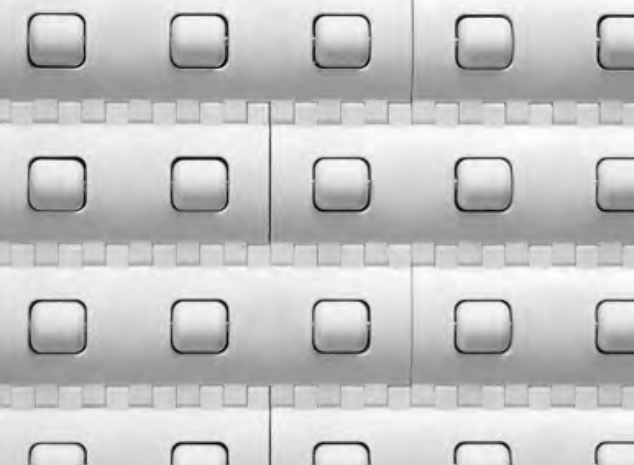
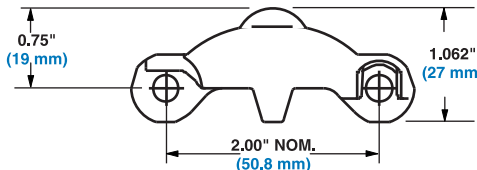


Roller Top™		
	in	mm
Pitch	2.00	50.8
Minimum Width	See Product Notes	
Width Increments	See Product Notes	
Opening Size (approximate)	-	-
Open Area	3%	
Hinge Style	Open	
Drive Method	Center-driven	
Product Notes		
<ul style="list-style-type: none"> • Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt. • Fully flush edges. • Uses headed rods. • Impact resistant belt designed for tough box and package, low back pressure applications. • Back-up load is 5-10% of product weight. • Acetal rollers, stainless steel axles. • Roller diameter - 0.70 in (17.8 mm). Roller length - 0.825 in (20.9 mm). • Roller spacing - 2.0 in (50.8 mm). • Standard roller indent is 0.60 in (15 mm) • Custom-built in widths of 4 in (102 mm) and 6 in (152 mm) and from 10 in (254 mm) and up in 2.00 in (50.8 mm) increments. 		
Additional Information		
<ul style="list-style-type: none"> • See "Belt Selection Process" (page 7) • See "Standard Belt Materials" (page 22) • See "Special Application Belt Materials" (page 22) • See "Friction factors" (page 26) 		

Belt Data							
Belt Material	Standard Rod Material Ø 0.24 in (6.1 mm)	BS Belt Strength		Temperature Range (continuous)		W Belt Weight	
		lb/ft	kg/m	°F	°C	lb/ft²	kg/m²
Polypropylene	Acetal	1000	1490	34 to 200	1 to 93	2.93	14.34
Polyethylene	Acetal	500	750	-50 to 150	-46 to 66	2.99	14.62
Acetal	Acetal	900	1340	-50 to 150	-46 to 66	4.11	20.10