


Perforated Flat Top Round Hole

	in	mm
Pitch	2.00	50.8
Minimum Width	2	51
Width Increments	0.66	16.8
Opening Size (approximate)	see photos on right	
Open Area	see photos on right	
Hinge Style	Open	
Drive Method	Center-driven	




Product Notes


- **Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt.**
- Round hole versions of Series 800 Perforated Flat Top.
- Smooth upper surface with fully flush edges.
- Uses headed rods.
- If using this belting in abrasive applications, Intralox recommends Series 800 polyurethane sprockets. Stainless steel split sprockets are not recommended for use with this belt.

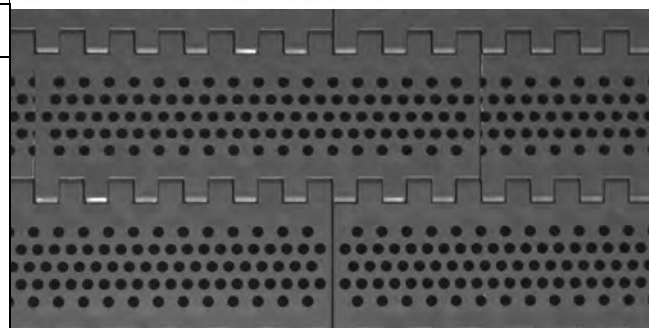

5/32" (4 mm) - 20% Open Area

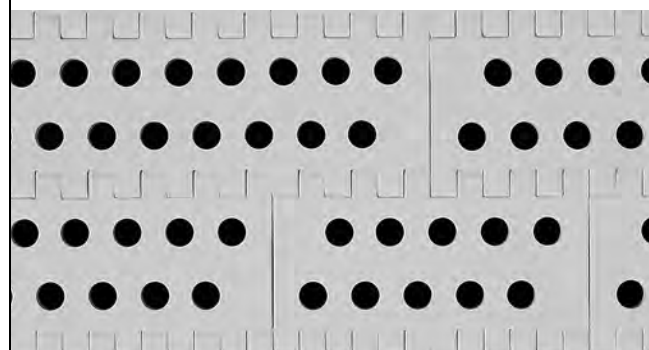

11/32" (8.7 mm) - 14% Open Area

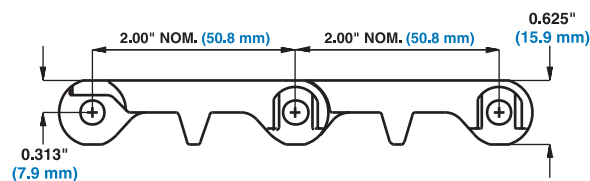

Additional Information

- See "Belt Selection Process" (page 7)
- See "Standard Belt Materials" (page 22)
- See "Special Application Belt Materials" (page 22)
- See "Friction factors" (page 26)

Belt Data

Belt Material	Standard Rod Material Ø 0.24 in (6.1 mm)	BS		Temperature Range (continuous)		W	
		Belt Strength	Belt Strength	°F	°C	Belt Weight	Belt Weight
		lb/ft	kg/m			lb/ft ²	kg/m ²
Polypropylene	Polypropylene	1000	1490	34 to 220	1 to 104	1.54	7.52
Polyethylene	Polyethylene	500	750	-50 to 150	-46 to 66	1.59	7.76
Acetal	Polyethylene	900	1340	-50 to 150	-46 to 66	2.28	11.15