



| Abrasion Resistant Split Metal Sprocket^a | | | | | | | | | | |
|--|--------------------|--------------------|--------------------|--------------------|-------------------|-------------------|----------------------|-----------|--------------|-----------|
| No. of Teeth (Chordal Action) | Nom. Pitch Dia. in | Nom. Pitch Dia. mm | Nom. Outer Dia. in | Nom. Outer Dia. mm | Nom. Hub Width in | Nom. Hub Width mm | Available Bore Sizes | | | |
| | | | | | | | U.S. Sizes | | Metric Sizes | |
| | | | | | | | Round in | Square in | Round mm | Square mm |
| 8 (7.61%) | 5.2 | 132 | 5.0 | 127 | 1.7 | 43 | | 1.5 | | 40 |
| | | | | | | | | 2.5 | | 60 |
| 10 (4.89%) | 6.5 | 165 | 6.2 | 157 | 1.7 | 43 | | 1.5 | | 40 |
| | | | | | | | | 2.5 | | 60 |
| 12 (3.41%) | 7.7 | 196 | 7.5 | 191 | 1.7 | 43 | | 1.5 | | 40 |
| | | | | | | | | 2.5 | | 60 |
| 16 (1.92%) | 10.3 | 262 | 10.1 | 257 | 1.7 | 43 | | 1.5 | | 40 |
| | | | | | | | | 2.5 | | 60 |

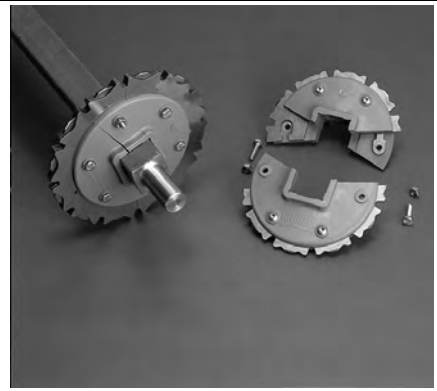

a. Contact Customer Service for lead times.


| Angled EZ Clean Sprocket^a | | | | | | | | | | |
|---|--------------------|--------------------|--------------------|--------------------|-------------------|-------------------|----------------------|-----------|--------------|-----------|
| No. of Teeth (Chordal Action) | Nom. Pitch Dia. in | Nom. Pitch Dia. mm | Nom. Outer Dia. in | Nom. Outer Dia. mm | Nom. Hub Width in | Nom. Hub Width mm | Available Bore Sizes | | | |
| | | | | | | | U.S. Sizes | | Metric Sizes | |
| | | | | | | | Round in | Square in | Round mm | Square mm |
| 6 (13.40%) | 4.0 | 102 | 3.8 | 97 | 2.0 | 50.8 | | 1.5 | | 40 |
| | | | | | | | | 1.5 | | 40 |
| 8 (7.61%) | 5.2 | 132 | 5.0 | 127 | 2.0 | 50.8 | | 1.5 | | 40 |
| | | | | | | | | 1.5 | | 40 |
| 10 (4.89%) | 6.5 | 165 | 6.2 | 157 | 2.0 | 50.8 | | 1.5 | | 40 |
| | | | | | | | | 1.5 | | 40 |
| 12 (3.41%) | 7.7 | 196 | 7.5 | 191 | 2.0 | 50.8 | | 1.5 | | 40 |
| | | | | | | | | 1.5 | | 40 |
| 16 (1.92%) | 10.3 | 262 | 10.1 | 257 | 2.0 | 50.8 | | 1.5 | | 40 |
| | | | | | | | | 2.5 | | 60 |

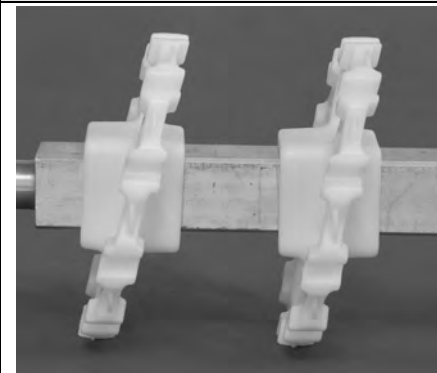

a. Contact Customer Service for lead times. Angled EZ Clean Sprockets can not be used with Series 800 Mesh Top.

| Streamline Flights^a | | |
|---------------------------------------|-----|---|
| Available Flight Height | | Available Materials |
| in | mm | |
| 1 | 25 | Polypropylene, Polyethylene, Acetal, Nylon, Detectable Polypropylene ^b |
| 2 | 51 | |
| 3 | 76 | |
| 4 | 102 | |
| 5 | 127 | |
| 6 | 152 | |

Note: Flights can be cut down to any height required for a particular application.
Note: Each flight rises out of the center of its supporting module, molded as an integral part. No fasteners are required.
Note: Flat Top flight is smooth (Streamline) on both sides.
Note: The minimum indent (without sideguards) is 1.3 in (33 mm).
Note: An extension can be welded at a 45° angle to create a bent flight.

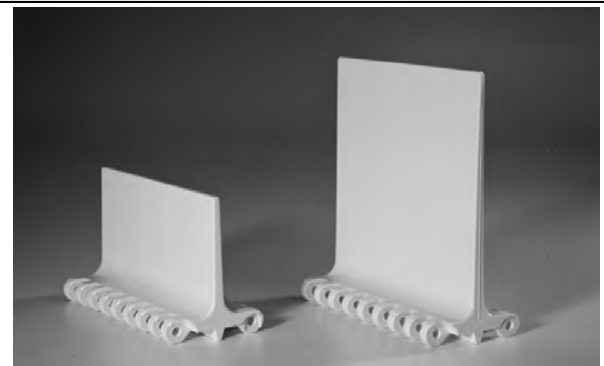

- a. Contact Customer Service for availability.
- b. Detectable Polypropylene can be sensed with metal detection equipment. Testing the material on a metal detector in a production environment is the best method for determining detection sensitivity.