


Impact Resistant Flights


Available Flight Height		Available Materials
in	mm	
1	25	Acetal, X-Ray Detectable Acetal
2	51	
3	76	
4	102	

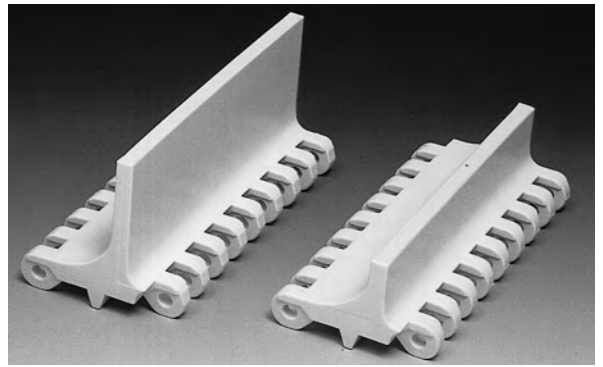

Note: Flights can be cut down to any height required for a particular application.
Note: Each flight rises out of its supporting module, molded as an integral part. No fasteners are required.
Note: The minimum indent (without sideguards) is 1.3 in (33 mm).

Open Hinge Impact Resistant Flights


Available Flight Height		Available Materials
in	mm	
4	102	Polypropylene, Detectable Polypropylene, Polyethylene, Acetal

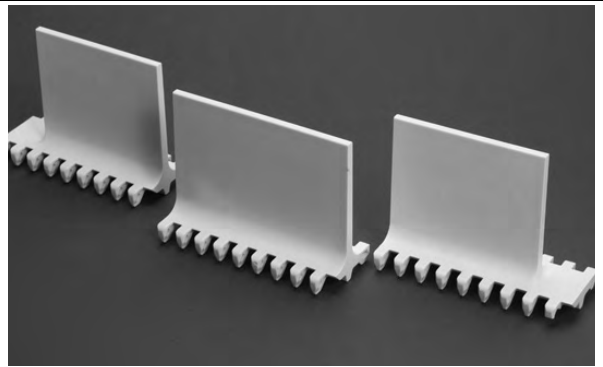

Note: Each flight rises out of the center of its supporting module. No fasteners are required.
Note: The minimum indent (without sideguards) is 1.3 in (33 mm)
Note: Standard 4 in (102 mm) height can be cut to suit application.
Note: Molded 1.3 in (33 mm) indent available.

Tough Flights

Available Flight Height		Available Materials
in	mm	
4	102	Hi-Impact
6	152	

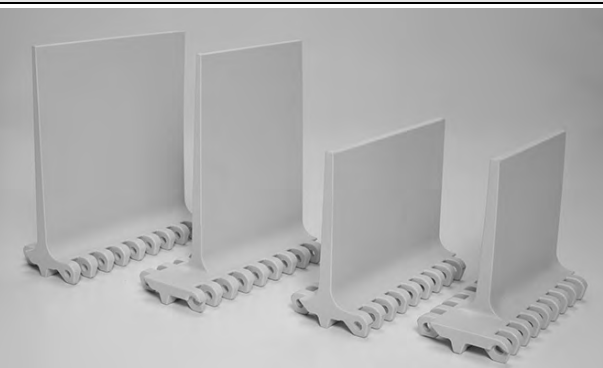

Note: Flights can be cut down to any height required for a particular application.
Note: Each flight rises out of the center of its supporting module. No fasteners are required.
Note: The minimum indent (without sideguards) is 1.3 in (33 mm)
Note: Molded 2 in (51 mm) indent available.

Tapered Edge

Available Materials
Polypropylene, Acetal

Note: Compatible with Series 800 Flat Top and Series 800 Mesh Top
Note: Designed to accept headed plastic rods
Note: Steel rods will be retained with plastic rodlets

