


## Nub Top Molded-in Sideguards

Available Sizes		Available Materials
in	mm	
4	102	Acetal, Polypropylene

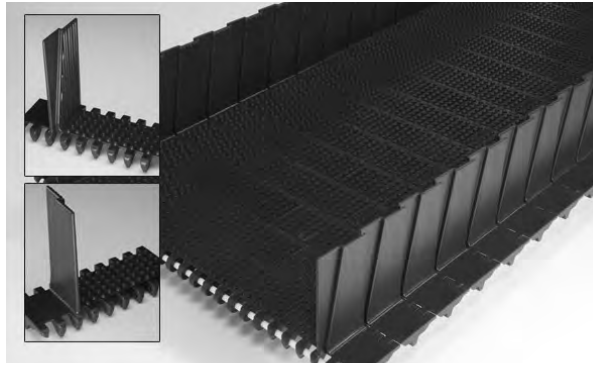


**Note:** Molded as an integral part of the belt, with no fasteners required.  
**Note:** Part of Intralox's EZ Clean product line.  
**Note:** Standard 4 in (102 mm) height can be cut to suit application.  
**Note:** Nub Top™ design and No Cling rib feature provide a non-stick conveying surface that delivers superior product release and cleanability.  
**Note:** Overlapping sideguards open fully when wrapping around sprocket, allowing greater access during cleaning. Sideguards will open partially on forward bends of elevating conveyors.  
**Note:** The molded indent is 1.3 in (33 mm).  
**Note:** The minimum backbend radius is 10 in (254 mm).  
**Note:** Sideguards can be spliced into all Series 800 Belt Styles, except Series 800 Perforated Flat Top (18% open Area) and Series 800 Flush Grid Nub Top.

## Scoop/Bucket Flight Cross Sectional Area for Vertical Incline

in	mm	sq. in	sq. mm
<b>Scoop Height</b>		<b>Area</b>	
3	76	4.3	2774
4	102	6.0	3871
6	152	9.5	6129
<b>Bucket Height</b>		<b>Area</b>	
2.25	57	2.3	1484
3.00	76	4.3	2774
4.00	102	6.0	3871
6.00	152	9.5	6129

**Note:** Minimum row spacing is 6 in (152 mm) for 6 in (152 mm) Scoop/Buckets and 4 in (102 mm) for all other sizes.

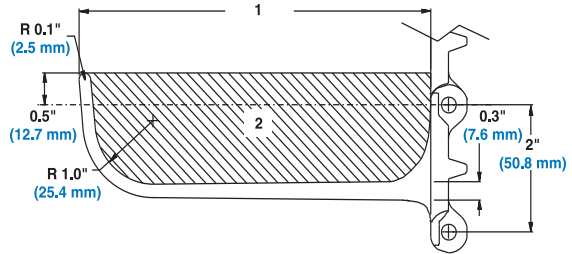

1 - Height

2 - Area