



Medium Slot SSL

	in	mm
Pitch	2.0	50
Minimum Width	11.3	288
Width Increments	0.66	17
Slot Size, Linear	0.08 x 0.40	2.0 x 10.2
Slot Size, Transverse	0.09 x 0.24	2.3 x 6.1
Open Area	26%	
Hinge Style	Open	
Drive Method	Center-Driven	

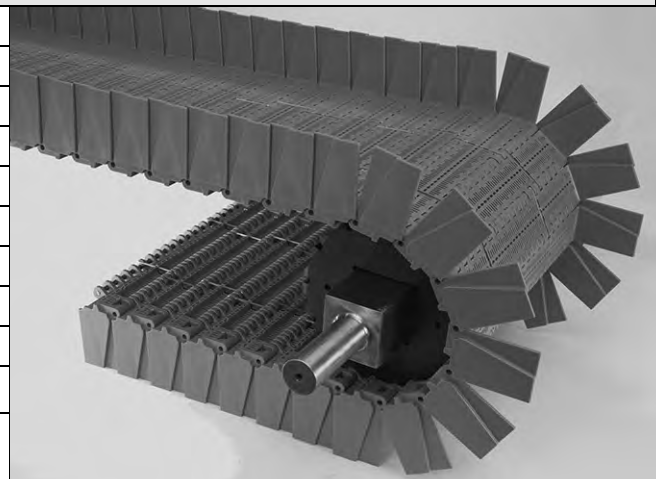


Product Notes

- **Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt.**
- Proven Enduralox™ polypropylene material increases resistance to chemical and temperature cycling.
- Proven drive system requires less back tension and is less sensitive to belt elongation.
- Barn door style rod retention system simplifies installation and routine maintenance.
- Uses headless rods.
- Molded-in sideguards (MISG), flush with belt edges, provide maximum utilization of belt surface and robust design reduces contamination risks.
- For belts with molded-in sideguards (MISG), provide a minimum backbend radius of 7 in (180 mm).

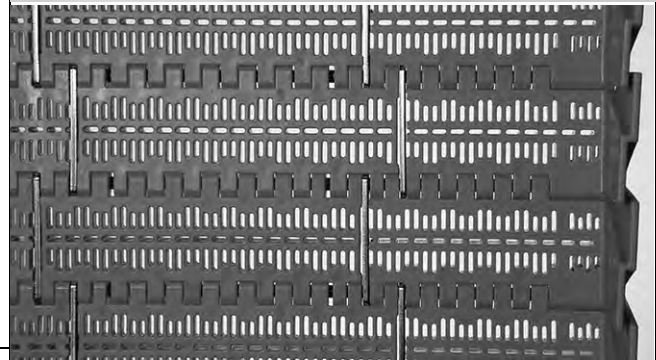

Additional Information

- See "Belt Selection Process" (page 7)
- See "Standard Belt Materials" (page 22)
- See "Special Application Belt Materials" (page 22)

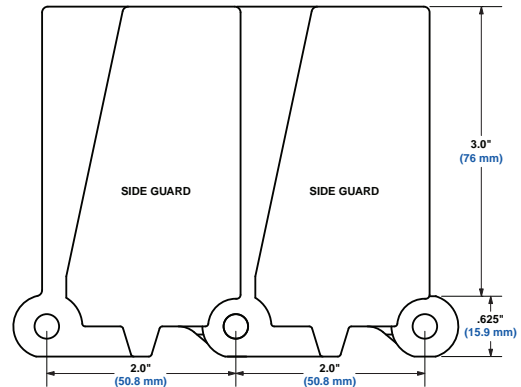

Belt Data

Belt Material	Standard Rod Material Ø 0.24 in (6.1 mm)	BS Belt Strength		Temperature Range (continuous)		W Belt Weight	
		lb/ft	kg/m	°F	°C	lb/ft ²	kg/m ²
Enduralox Polypropylene	Wear-resistant Stainless Steel	2000	3000	34 to 212	1 to 100	2.6	12.7