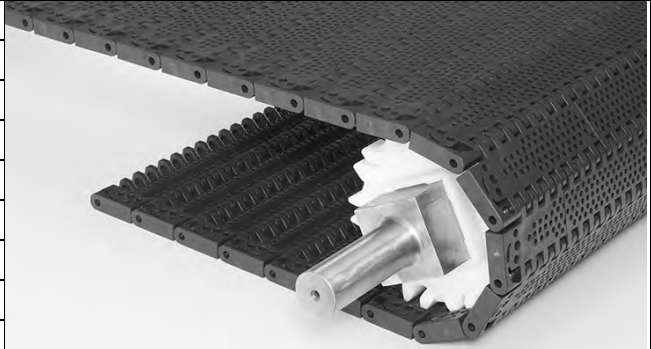
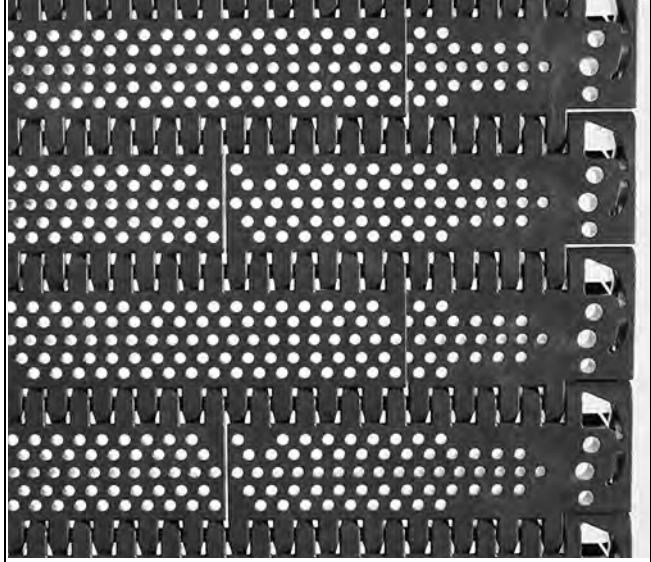
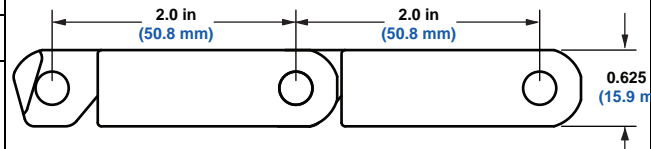


Round Hole Enhanced		
	in.	mm
Pitch	2.0	50.8
Minimum Width	6	152.4
Width Increments	0.66	16.8
Opening Size (approximate)	-	-
Open Area	20%	
Hinge Style	Open	
Drive Method	Center-driven	
Product Notes		
<ul style="list-style-type: none"> • Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt. • Enhanced hole pattern and design of S800 Perforated Flat Top. • Improved hole pattern and more open hinge design allows for better air flow and drainage. • Smooth upper surface with fully flush edges. • Uses a headless rod retention feature. 		
Additional Information		
<ul style="list-style-type: none"> • See “Belt Selection Process” (page 7) • See “Standard Belt Materials” (page 22) • See “Special Application Belt Materials” (page 22) 		

Belt Data									
Belt Material	Standard Rod Material Ø 0.24 in. (6.1 mm)	BS	Belt Strength		Temperature Range (continuous)		W	Belt Weight	
			lb/ft	kg/m	°F	°C		lb/ft ²	kg/m ²
Acetal	304 Stainless Steel		1500	2200	-50 to 150	-46 to 66	2.28	11.131	