




Mesh Top™		
	in	mm
Pitch	1.07	27.2
Minimum Width	2	51
Width Increments	0.33	8.4
Opening Size (approximate)	0.05 × 0.31	1.3 × 7.9
Open Area	24%	
Hinge Style	Open	
Drive Method	Center-driven	
Product Notes		
<ul style="list-style-type: none"> Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt. Fully flush edges. Uses headed rods. Ideal for fruit and vegetable processing, especially for stemmed products and dewatering applications. 		
Additional Information		
<ul style="list-style-type: none"> See "Belt Selection Process" (page 7) See "Standard Belt Materials" (page 22) See "Special Application Belt Materials" (page 22) See "Friction factors" (page 26) 		




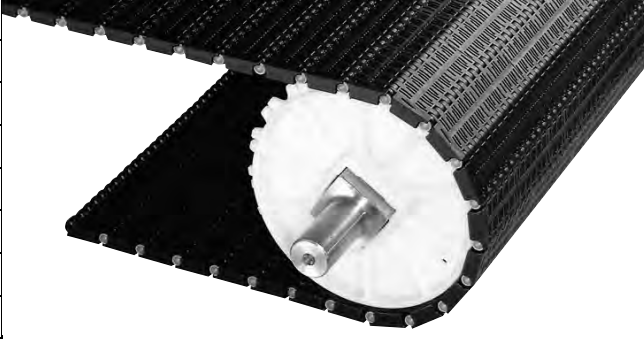

Top surface



Underside surface

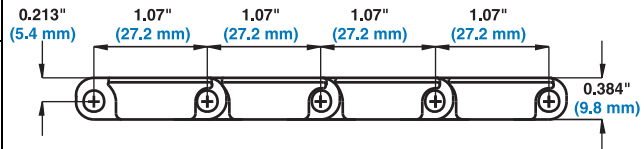

Belt Data							
Belt Material	Standard Rod Material Ø 0.18 in (4.6 mm)	BS Belt Strength		Temperature Range (continuous)		W Belt Weight	
		lb/ft	kg/m	°F	°C	lb/ft ²	kg/m ²
Acetal	Polypropylene	1480	2200	34 to 200	1 to 93	1.39	6.79
Polypropylene	Polypropylene	700	1040	34 to 220	1 to 104	0.93	4.55
Polyethylene	Polyethylene	350	520	-50 to 150	-46 to 66	0.99	4.84