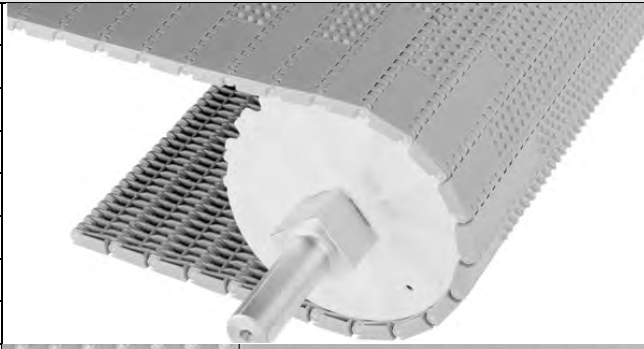
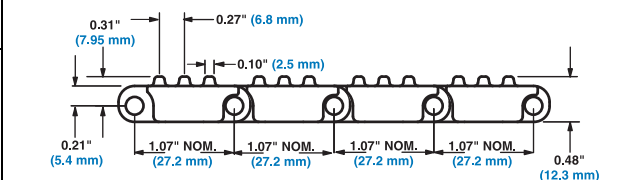


Nub Top™		
	in	mm
Pitch	1.07	27.2
Minimum Width	10	254
Width Increments	0.33	8.4
Open Area	0%	
Product Contact Area	7%	
Hinge Style	Closed	
Drive Method	Center-driven	
Product Notes		
<ul style="list-style-type: none"> • Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt. • Fully flush edges. • Uses headed rods. • Ideal for batch-off applications. • Minimum nominal alternating edge indents of 2 in (51 mm) & 3 in (76 mm). 		
Additional Information		
<ul style="list-style-type: none"> • See "Belt Selection Process" (page 7) • See "Standard Belt Materials" (page 22) • See "Special Application Belt Materials" (page 22) • See "Friction factors" (page 26) 		

Belt Data									
Belt Material	Standard Rod Material Ø 0.18 in (4.6 mm)	BS	Belt Strength ^a		Temperature Range (continuous)		W	Belt Weight	
			lb/ft	kg/m	°F	°C		lb/ft ²	kg/m ²
Polypropylene	Polypropylene	700	1040	34 to 220	1 to 104	0.98	4.78		

a. When using steel sprockets, the belt strength for polyethylene is 240 lb/ft (360 kg/m). Contact Customer Service for availability of polyurethane sprockets.