



Flush Grid Nub Top™

	in	mm
Pitch	1.07	27.2
Minimum Width	6	152
Width Increments	0.33	8.4
Opening Size (approximate)	0.24 x 0.28	6.1 x 7.1
Open Area	38%	
Product Contact Area	3%	
Hinge Style	Open	
Drive Method	Center-driven	

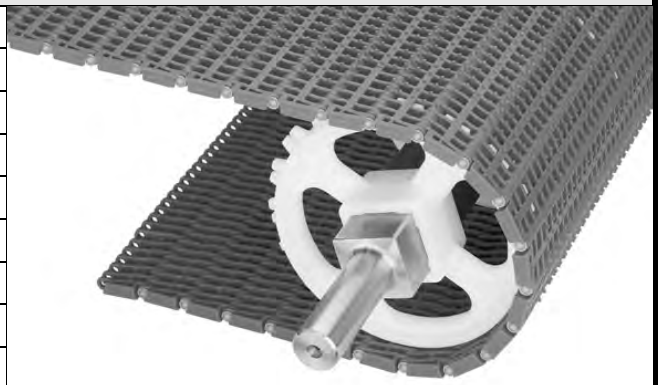


Product Notes

- **Contact Intralox for precise belt measurements and stock status before designing equipment or ordering a belt.**
- Can only be used with Series 900 Flush Grid base flights.
- Fully flush edges.
- Uses headed rods.
- Belts are built with Flush Grid edge modules. Minimum nominal alternating edge indents of 1 in (25 mm) and 2 in (51 mm) pattern.
- Not recommended for back-up conditions. If friction values between product and belt are required, contact Intralox Sales Engineering.

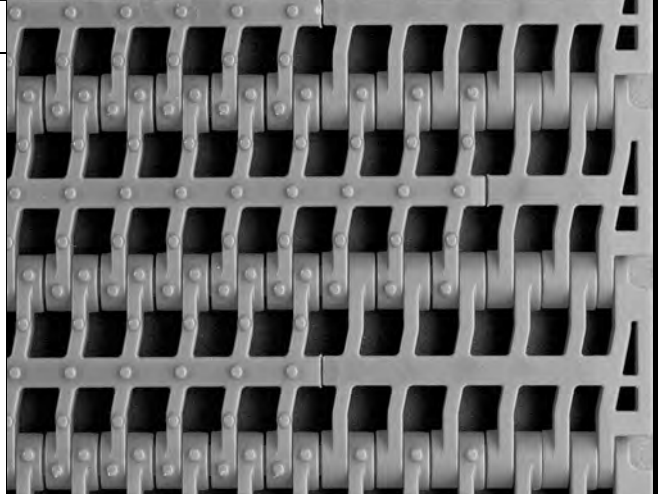

Additional Information

- See "Belt Selection Process" (page 7)
- See "Standard Belt Materials" (page 22)
- See "Special Application Belt Materials" (page 22)
- See "Friction factors" (page 26)

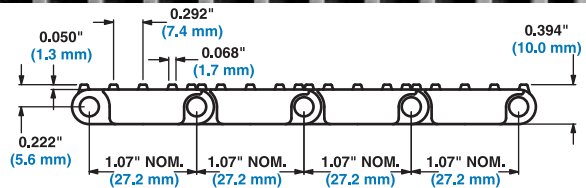

Belt Data

Belt Material	Standard Rod Material Ø 0.18 in (4.6 mm)	BS Belt Strength ^a		Temperature Range (continuous)		W Belt Weight	
		lb/ft	kg/m	°F	°C	lb/ft ²	kg/m ²
Polypropylene	Polypropylene	700	1040	34 to 220	1 to 104	0.80	3.91

a. When using steel sprockets, the belt strength for polyethylene is 240 lb/ft (360 kg/m).