

Flat Top Base Flights (No-Cling)

| Available Flight Height | | Available Materials |
|-------------------------|----|---------------------|
| in. | mm | |
| 3 | 76 | |

Polypropylene, Nylon

- Note:** Flights can be cut down to any height required for a particular application.
- Note:** Each flight rises out of the center of its supporting module, molded as an integral part. No fasteners are required.
- Note:** No-Cling vertical ribs are on both sides of the flight.
- Note:** The minimum indent (without sideguards) is 2.0 in. (50.8 mm).




Conveyor Frame Dimensions

Regardless of type or configuration, all conveyors using Intralox belts have some basic dimensional requirements. Specifically, dimensions “A”, “B”, “C” and “E” listed below should be implemented in any design.

For general applications and applications where end transfer of tip-sensitive product is not critical, use the “A” dimension at the bottom of the range.

Conveyor frame dimensions are established using the top of the roller as the top of the belt and the bottom of the module as the bottom of the belt. “B” dimension is based on a 0.5 in. (12.7 mm) thick carryway.

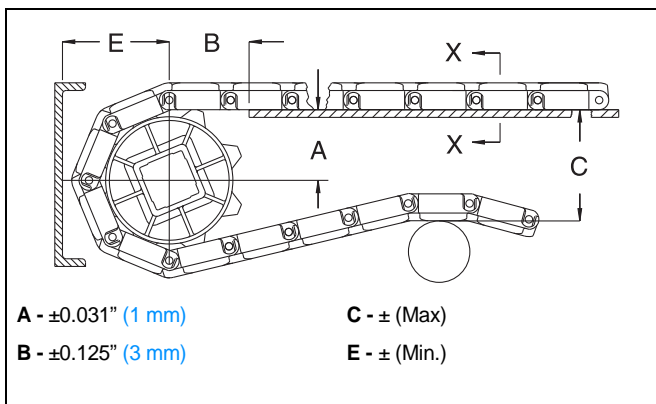

| Sprocket Description | | | A | | B | | C | | E | |
|-------------------------------|-----|-----------|-----------------------|-------|------|----|------|-----|------|-----|
| Pitch Diameter | | No. Teeth | Range (Bottom to Top) | | in. | mm | in. | mm | in. | mm |
| in. | mm | | in. | mm | | | | | | |
| SERIES 9000 FLUSH GRID | | | | | | | | | | |
| 3.3 | 84 | 10 | 1.30-1.38 | 33-35 | 1.65 | 42 | 3.26 | 83 | 1.95 | 50 |
| 4.2 | 107 | 13 | 1.80-1.86 | 46-47 | 1.85 | 47 | 4.22 | 107 | 2.42 | 61 |
| 6.1 | 155 | 19 | 2.78-2.82 | 71-72 | 2.23 | 57 | 6.14 | 156 | 3.38 | 86 |
| 6.5 | 165 | 20 | 2.94-2.98 | 75-76 | 2.35 | 60 | 6.46 | 164 | 3.54 | 90 |
| 8.1 | 206 | 25 | 3.75-3.78 | 95-96 | 2.63 | 67 | 8.06 | 205 | 4.34 | 110 |