


<b>Angled EZ Clean Sprocket<sup>a</sup></b>										
No. of Teeth (Chordal Action)	Nom. Pitch Dia. in.	Nom. Pitch Dia. mm	Nom. Outer Dia. in.	Nom. Outer Dia. mm	Nom. Hub Width in.	Nom. Hub Width mm	Available Bore Sizes			
							U.S. Sizes		Metric Sizes	
							Round in.	Square in.	Round mm	Square mm
<b>6</b> (13.40%)	4.0	102	3.8	97	2.0	50.8		1.5		40
<b>8</b> (7.61%)	5.2	132	5.0	127	2.0	50.8		1.5		40
<b>10</b> (4.89%)	6.5	165	6.2	157	2.0	50.8		1.5		40
<b>12</b> (3.41%)	7.7	196	7.5	191	2.0	50.8		1.5		40
<b>16</b> (1.92%)	10.3	262	10.1	257	1.5	38		1.5		40
								2.5		60

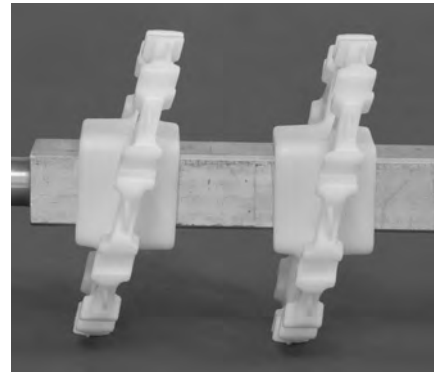

a. Contact Customer Service for lead times. Angled EZ Clean Sprockets can not be used with Series 800 Mesh Top

<b>Streamline Flights<sup>a</sup></b>		
Available Flight Height		Available Materials
in.	mm	
4	102	Polypropylene, Acetal


**Note:** Flights are available in the SeamFree™ design at 12 in. (304 mm) wide; flighted belts greater than 12 in. (304 mm) wide are available with seams minimized.

**Note:** Flights can be cut down to any height required for a particular application.

**Note:** Each flight rises out of the center of its supporting module, molded as an integral part. No fasteners are required.

**Note:** Flat Top flight is smooth (Streamline) on both sides.

**Note:** Molded-in, 1.3 in. (33 mm) indent from each edge.

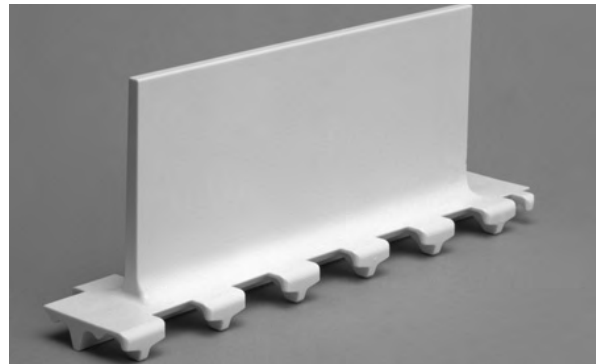

a. Contact Customer Service for availability.